

## ADVANCIA PLUS, Electric cooking unit, BAIN MARIE on open cupboard



3 mm Top



FlushTop



CleaningSystemPlus

### BAIN MARIE B1A9BM+4PE



\* Shown with door  
kit Accessory

### ADVANCIA PLUS ASSETS

**3mmTop** : One piece 3mm thick stainless steel structure.

**FlushTop** : Module can be butt jointed.

**CleaningSystemPlus** : Plumbed to waste or to an independent container.

### GENERAL

- \* All stainless steel construction designed to avoid any infiltration.
- \* Unfailing sturdy equipment for direct wall fixation.
- \* Controls grouped together and recessed protecting them for impact and spillages.
- \* Appliance delivered with 200mm fixed stand with 4 adjustable feet.

### BAIN MARIE

- \* One piece radiused stainless well, available 400mm wide with a capacity of 4 GN1/3 containers 150mm deep.
- \* The well can accept GN 1/1, GN 1/3 and GN 1/2 without adaptor bars.
- \* Heat is provided by an armoured stainless element.
- \* Controlled by a 6 position simmerstat and heating indicator.
- \* Safety thermostat.
- \* Water supply to the well via solenoid with push button on the fascia and connection in flexible hose provided.
- \* Delivered with flush fitting stainless lid.

### OPEN CUPBOARD

- \* Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips (400mm wide).

### OPTION

- \* One-piece wall or central top.

### ACCESSORIES

- \* See technical data : General features.

### STANDARDS : Compliance with standards

**EN 60335-2-50**: European standards relating to the safety of electric appliances.  
(French standards: Classification index C 73-850).

**IP 25 and IK 9**: Protection indexes.

**XP U 60-010**: Hygiene.




**BONNET GRANDE CUISINE**

**Siège social:**

Rue des Frères Lumière - Z.I Mitry Compans  
77292 MITRY MORY Cedex

**B1A9BM+4PE**

-  **ELECTRICAL connection**  
Electric inlet at 615mm from the floor  
(Flexible cable 1.5 m in length)
-  **POTABLE COLD WATER**  
Water inlet at 600mm from the floor
-  **DRAIN**  
Drain outlet at 535mm from the floor  
Delivered with drain set up at the back of  
the equipment, possibility to set up the  
drain outlet pipe inside the cupboard

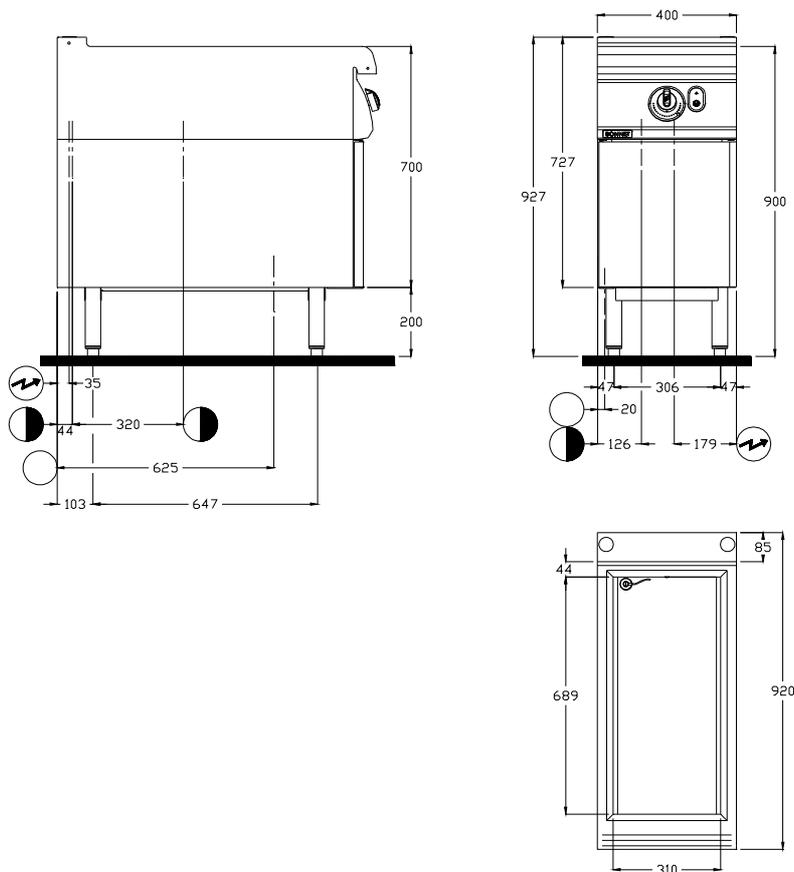

**DIMENSIONS (mm)**

Width	400
Depth	920
Height	927

**PACKAGING (mm)**

Width	540
Depth x Height	1060 x 1150

**WEIGHT (KG)**

70

**COMPOSITION OF TOP**

Number of GN 1/3 recipients	4
-----------------------------	---

**COMPOSITION OF THE BOTTOM PART**

Width of cupboard	400
-------------------	-----

 **ELECTRICITY** (Single-phase or Three-phase 230V+E or 400V+N+E)

Power (kW)	230V a.c.	1.5
	230V 3a.c.	1.5
	400V 3Na.c.	1.5
Max. Intensity (A)	230V a.c.	6.5
	230V 3a.c.	6.5
	400V 3Na.c.	6.5

 **POTABLE COLD WATER**

Pressure (Min / Max)	150/600 kPa (1.5 bars / 6 bars)
Max. temperature	30°C
Nature	Filtered to 50 microns
Connection	Flexible Ø 20/27 female (3/4")

 **DRAIN**

Connection	Smooth stainless steel tube Ø 25 + silicon tube
------------	---