


## ADVANCIA, Electric cooking unit, FridgeBloc with compressor

**3 mm Top****FlushTop**

### FRIDGEBLOC B1A9BR5BE



### ADVANCIA ASSETS

**3mmTop** : One piece 3mm thick stainless steel structure.

**FlushTop** : Module can be butt jointed.

### GENERAL

- \* All stainless steel construction designed to avoid any infiltration.
- \* Extremely robust it can be bolted directly to a wall.
- \* Appliance delivered with 200mm fixed stand with 4 adjustable feet.

### FRIDGEBLOC

- \* Blown air Fridgebloc for rapid cooling and uniform temperature distribution, designed for storage of food at a positive temperature.
- \* The Fridgebloc is delivered with its refrigeration equipment (compressor and controls) ready for use.
- \* Top opening fitted with 2 sliding covers virtually flush fitting, allowing the use of 100mm deep GN1/1 containers without handles.
- \* Internal cavity in stainless steel, easy to clean. Insulation with injected polyurethane foam.
- \* Fitting out of cupboard provided to receive three 100mm deep GN1/1 containers (without handle) mounted on fixed slides.
- \* Stainless steel lined door with magnetic seal, hinged to the left. Reversible hinge door.
- \* Controlled by electronic digital regulator, with automatic defrost, and hot gas re-evaporation of defrost condensate, and a stop /start button.
- \* High and low alarm, audible and visual.
- \* Temperature range : +0°C to +12°C. Adapted to operate in ambient temperatures up to 43°C.
- \* R290 compressor single phase 230 v 50 Hz, fitted to a sliding frame. Built in compressor suitable for the conditions of operation. Equipment contains flammable refrigerant.
- \* Condensate collection tray under the evaporator.
- \* Insulation and refrigerant without CFC nor HCFC.
- \* Access to all components from the front of the unit.
- \* Supplied without container.

### STANDARDS : Complies with standards

**EN 60335-2-89**: European standards relating to the safety of electric appliances.  
(French standards: Classification index C 73-889).

**IP 25 and IK 9**: Protection indexes.

**XP U 60-010**: Hygiene.



**BONNET GRANDE CUISINE**




**Registered office:**

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

**B1A9BR5BE**

 **ELECTRICAL connection**  
Electric inlet at 250 mm from the floor  
(Flexible cable 1.5 m in length)

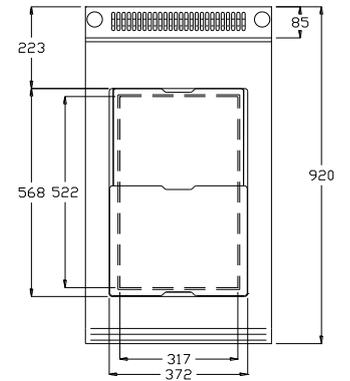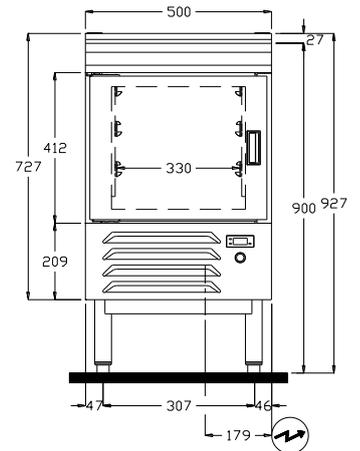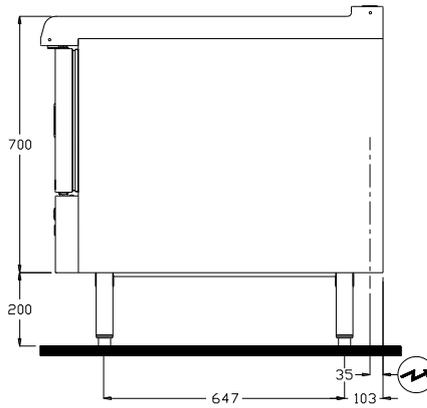

**DIMENSIONS (mm)**

Width	500
Depth x Height	920 x 927

**CAPACITIES**

Cupboard (litres)	90
100mm deep GN1/1 container	4

**PACKAGING (mm)**

Width	640
Depth x Height	1060 x 1150

**WEIGHT (KG) (gross / net)**

95 / 82

**COMPOSITION OF TOP**

Opening for GN 1/1 container	1
------------------------------	---

**COMPOSITION OF THE BOTTOM PART**

Cupboard WIDTH	500
Container capacity for 100mm deep GN1/1	3

 **ELECTRICITY** (Single phase 230V+E)

Power (kW)	230V a.c.	0.3
Max. Intensity (A)	230V a.c.	2

**REFRIGERATION POWER (to -10 / +55°C)**

Power (Watts)	190
---------------	-----

**REQUIRED REFRIGERATION POWER (to -10 / +55°C)**

Power (Watts)	190
---------------	-----