




**BONNET GRANDE CUISINE**

**Siège social:**

Rue des Frères Lumière - Z.I Mitry Compans  
77292 MITRY MORY Cedex

## **ADVANCIA, Electric cooking unit, SOLID PLATE on open cupboard**



3 mm Top



EasyCleaningSystem

### **SOLID PLATE B1A9CE4PE**



*\* Shown with door  
kit Accessory*

### **ADVANCIA ASSETS**

**3mmTop** : One piece 3mm thick stainless steel structure.

**EasyCleaningSystem** : Module can be butt jointed.

### **GENERAL**

- \* All stainless steel construction designed to avoid any infiltration.
- \* Unfailing sturdy equipment for direct wall fixation.
- \* Controls grouped together and recessed protecting them for impact and spillages.
- \* Appliance delivered with 200mm fixed stand with 4 adjustable feet.

### **SOLID PLATE**

- \* Fitted with one special iron plates 15mm thick, offering 29 dm<sup>2</sup> for close positioning of all sizes of pan.
- \* The unit is fitted with two hearths each 4000 Watts (or 3500 depending on the voltage) allowing rapid temperature rise with virtually no inertia.
- \* Each hearth is controlled by a thermostat with indicator light allowing temperature control from 80° to 500°C on 2 independent heating zones.  
The cooking surface can shift from simmering to boiling or any possible combination.
- \* Thermal safety under each hearth.

### **OPEN CUPBOARD**

- \* Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips (400mm wide).

### **OPTION**

- \* One-piece wall or central top.

### **ACCESSORIES**

- \* See technical data : General features.

### **STANDARDS : Compliance with standards**

**EN 60335-2-36 and EN 60335- 2-49**: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-836 and C 73-849).

**IP 25 and IK 9**: Protection indexes.

**XP U 60-010**: Hygiene.






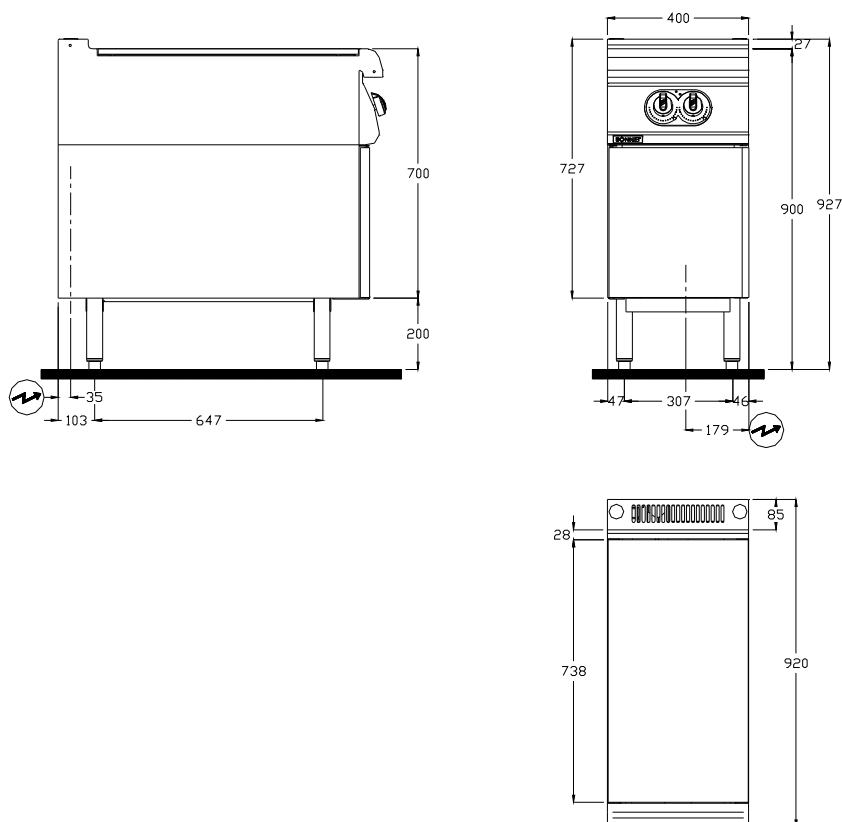
# BONNET GRANDE CUISINE

## Siège social:

Rue des Frères Lumière - Z.I Mitry Compans  
77292 MITRY MORY Cedex

### B1A9CE4PE

 **ELECTRICAL connection**  
Electric inlet at 615mm from the floor  
(Flexible cable 1.5 m in length)



#### DIMENSIONS (mm)

Width	400
Depth x Height	920 x 927
Plate	400 x 738
Useful surface (dm <sup>2</sup> )	29

#### PACKAGING (mm)

Width	540
Depth x Height	1060 x 1150

#### WEIGHT (KG)

80

#### COMPOSITION OF TOP

Hobs of 3.5 or 4 kW	2
---------------------	---

#### COMPOSITION OF THE BOTTOM PART

Width of cupboard	400
-------------------	-----

#### ELECTRICITY (Three-phase 230V+E or 400V+N+E)

##### Appliance

Power (kW)	230V 3a.c.	7
	400V 3Na.c.	8
Max. Intensity (A)	230V 3a.c.	26.4
	400V 3Na.c.	17.3

##### Accessory cupboard heating top (to be added to the total power of the appliance)

Power (kW)	400V 3Na.c.	1
------------	-------------	---