


ADVANCIA PLUS, Electric cooking top, SOLID PLATE

SOLID PLATE B1A9CE+10DE



3 mm Top




FlushTop



CleaningSystemPlus



FullPowerSystem

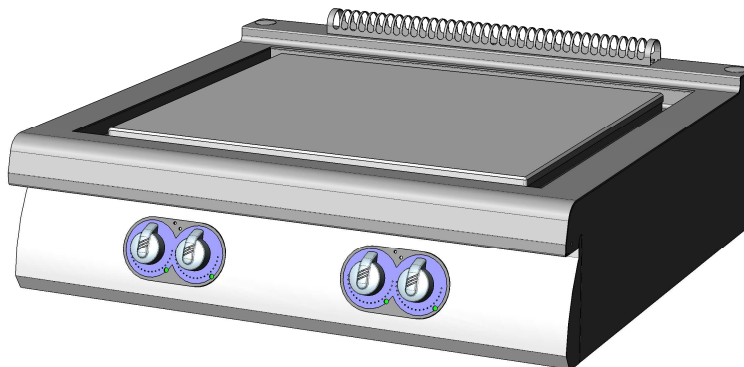

ADVANCIA PLUS ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

CleaningSystemPlus : Plate that is flush with the worktop fitted over a channel.

FullPowerSystem : Temperature adjustment from 80°C to 500°C over 2 or 4 independent heating zones.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.

SOLID PLATE

- * L'appareil reçoit une plaque en acier spécial, offrant une surface de 48 dm² pour la juxtaposition de casseroles tout diamètre.
 - * L'appareil est équipé de quatre foyers de 4000 Watts chacun (ou 3500 Watts selon tension) permettant des montées en température rapides et sans inertie.
 - * Le plan de cuisson peut passer du mijotage au coup de feu, avec toutes les combinaisons possibles.
 - * Chaque foyer est commandé par thermostat et voyant de chauffe.
 - * Sécurité thermique sur chaque foyer.
- Channel drains to the rear.

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 60335-2-36: European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-836).

IP 25 and IK 9: Protection indexes.

XP U 60-010: Hygiene.





BONNET GRANDE CUISINE

Siège social:

Rue des Frères Lumière - Z.I Mitry Compans
77292 MITRY MORY Cedex

B1A9CE+10DE

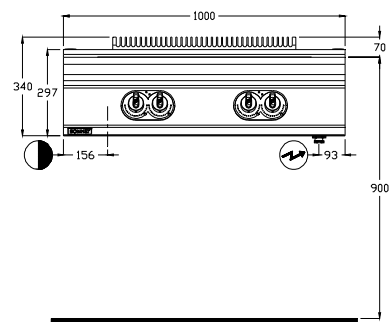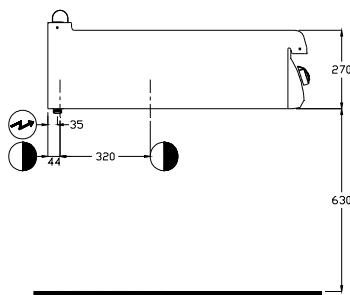


ELECTRICAL connection

Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)

DRAIN

Drain outlet at 535mm from the floor
Delivered with drain set up at the back of
the equipment, possibility to set up the
drain outlet pipe at the front

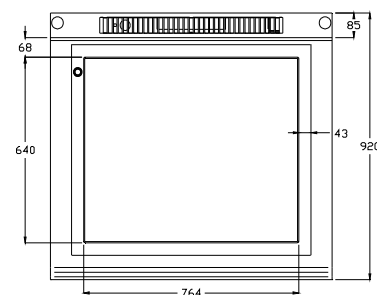

DIMENSIONS (mm)

Width	1000
Depth	920
Height	340
PlaTE	764 x 640
Useful surface (dm ²)	48

PACKAGING (mm)

Width	1140
Depth	1090
Height	700

WEIGHT (KG)

135

COMPOSITION OF TOP

Hobs of 3.5 or 4 kW	4
---------------------	---

ELECTRICITY (Three-phase 230V+E or 400V+N+E)

Power (kW)	230V 3a.c.	14
	400V 3Na.c.	16
Max. Intensity (A)	230V 3a.c.	40.3
	400V 3Na.c.	26.5

DRAIN

Connection	Smooth stainless steel tube Ø 25 + silicon tube
------------	---