


ADVANCIA PLUS, Electric cooking unit, SOLID PLATE on open cupboard



3 mm Top



FlushTop



CleaningSystemPlus



FullPowerSystem

SOLID PLATE
B1A9CE+6PE



* Shown with door
kit Accessory

ADVANCIA PLUS ASSETS

3mmTop : Structure top piece all stainless steel 3 mm thick.

FlushTop : Module can be butt jointed.

CleaningSystemPlus : Plate that is flush with the worktop fitted over a channel.

FullPowerSystem : Temperature adjustment from 80°C to 500°C over 2 or 4 independent heating zones.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.
- * Appliance delivered with 200mm fixed stand with 4 adjustable feet.

SOLID PLATE

- * Fitted with one special iron plates 15mm thick, offering 27 dm² for close positioning of all sizes of pan.
- * The unit is fitted with two hearths each 4000 Watts (or 3500 depending on the voltage) allowing rapid temperature rise with virtually no inertia.
- * The cooking surface can shift from simmering to boiling or any possible combination.
- * Each hearth is controlled by a thermostat with indicator light
- * Thermal safety under each hearth.
- * Channel drains to the rear.

OPEN CUPBOARD

- * Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips (600mm wide).

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 60335-2-36 and EN 60335- 2-49: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-836 and C 73-849).

IP 25 and IK 9: Protection indexes.

XP U 60-010: Hygiene.


B1A9CE+6PE

ELECTRICAL connection

Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)


DRAIN

Drain outlet at 535mm from the floor
Delivered with drain set up at the back of
the equipment, possibility to set up the
drain outlet pipe inside the cupboard

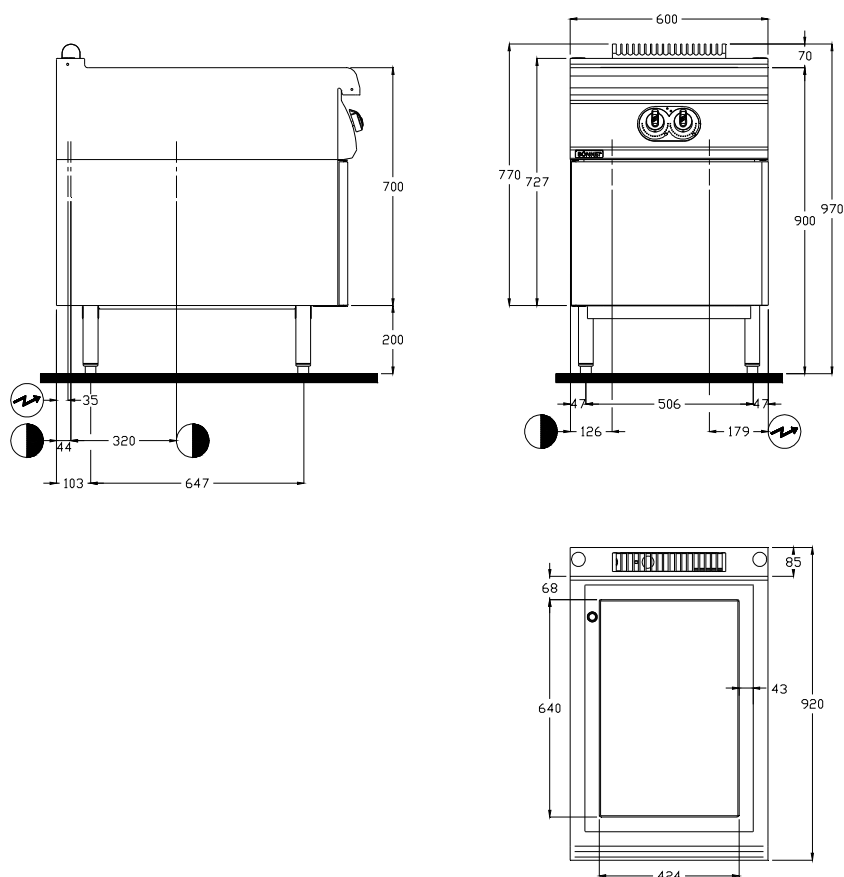
DIMENSIONS (mm)

Width	600
Depth x Height	920 x 970
Plate	424 x 640
Useful surface (dm ²)	27

PACKAGING (mm)

Width	740
Depth x Height	1060 x 1150

WEIGHT (KG)

85

COMPOSITION OF TOP

Hobs of 3.5 or 4 kW	2
---------------------	---

COMPOSITION OF THE BOTTOM PART

Width of cupboard	600
-------------------	-----


ELECTRICITY (Three-phase 230V+E or 400V+N+E)
Appliance

Power (kW)	230V 3a.c.	7
	400V 3Na.c.	8
Max. Intensity (A)	230V 3a.c.	26.4
	400V 3Na.c.	17.3

Accessory cupboard heating kit (to be added to the total power of the appliance)

Power (kW)	400V 3Na.c.	1
------------	-------------	---


DRAIN

Connection	Smooth stainless steel tube Ø 25 + silicon tube
------------	---