




BONNET GRANDE CUISINE

Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

ADVANCIA PLUS, Electric cooking unit, SMOOTH CHROMIUM PLANCHA on open cupboard



3 mm Top



FlushTop



CleaningSystemPlus



FullPowerSystem

SMOOTH CHROMIUM PLANCHA
B1A9CL+10PE



** Shown with door
kit Accessory*

ADVANCIA PLUS ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

CleaningSystemPlus : Plate that is flush with the worktop fitted over a channel with continuous water flow floating the grease away.

FullPowerSystem : Regulated cooking top.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.
- * Appliance delivered with 200mm fixed stand with 4 adjustable feet.

CHROMIUM PLANCHA

- * Fitted with a 15mm thick smooth Martin steel plate, providing a surface area of 48 dm², finish vibrated.
- * Hard chroming of plate: to avoid delicate products sticking and to benefit from a hard surface which allows thorough cleaning with a scraper without the risk of the surface degrading.
- * Heated by a bank of contact elements surrounded by a stainless box with rockwool insulation.
- * Controlled by thermostat permits regulation of plate temperature from 50 to 270°C: 2 independent control.

OPEN CUPBOARD

- * Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips (1000mm wide).

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 60335-2-38 and EN 60335- 2-49: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-838 and C 73-849).

IP 25 and IK 9: Protection indexes.

XP U 60-010: Hygiene.



B1A9CL+10PE

ELECTRICAL connection

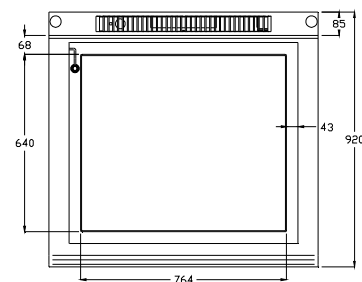
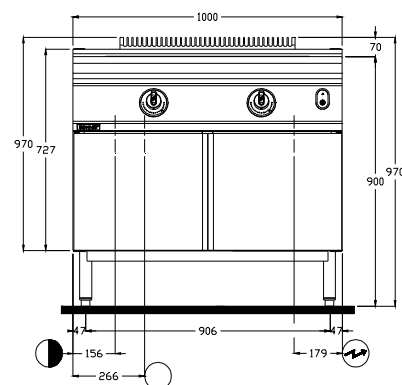
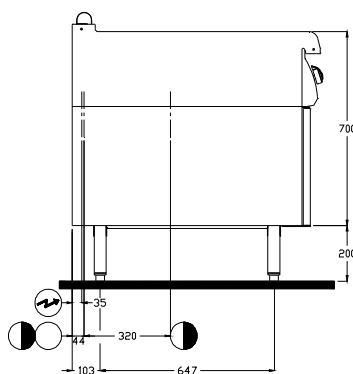
Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)


POTABLE COLD WATER

Water inlet at 600mm from the floor


DRAIN

Drain outlet at 535mm from the floor
Delivered with drain set up at the back of the equipment, possibility to set up the drain outlet pipe inside the cupboard


DIMENSIONS (mm)

Width	1000
Depth x Height	920 x 970
Plate	424 x 640
Useful surface (dm ²)	48

COLISAGE (mm)

Width	1140
Depth x Height	1090 x 1150

WEIGHT (KG)

150

COMPOSITION OF TOP

Plate width 424	1
-----------------	---

COMPOSITION OF THE BOTTOM PART

Width of cupboard	600
-------------------	-----


ELECTRICITY (Three-phase 230V+E or 400V+N+E)

Appliance

Power (kW)	230V 3a.c.	10.8
	400V 3Na.c.	10.8
Max. Intensity (A)	230V 3a.c.	27.1
	400V 3Na.c.	15.6

Accessory cupboard heating kit (to be added to the total power of the appliance)

Power (kW)	230V 3a.c.	2
	400V 3Na.c.	2


POTABLE COLD WATER

Pressure (Min / Max)	150/600 kPa (1.5 bars / 6 bars)
Max. temperature	30°C
Nature	Filtered to 50 microns
Connection	Flexible Ø 20/27 female (3/4")


DRAIN

Connection	Smooth stainless steel tube Ø 25 + silicon tube
------------	-------------------------------------------------