

ADVANCIA PLUS, Electric cooking top, SMOOTH CHROMIUM PLANCHA

SMOOTH CHROMIUM PLANCHA B1A9CL+6DE



3 mm Top



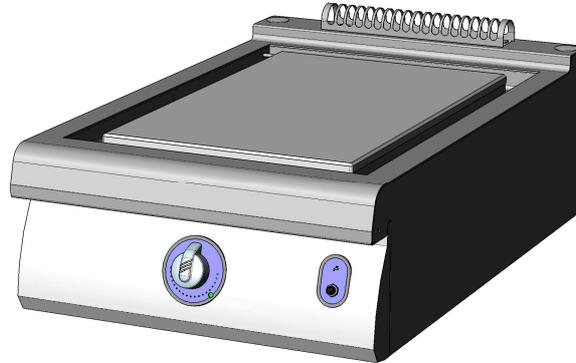
FlushTop



CleaningSystemPlus



FullPowerSystem



ADVANCIA PLUS ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

CleaningSystemPlus : Plate that is flush with the worktop fitted over a channel with continuous water flow floating the grease away.

FullPowerSystem : Regulated cooking top.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.

CHROMIUM PLANCHA

- * Fitted with a 15mm thick smooth Martin steel plate, providing a surface area of 27 dm², finish vibrated.
- * Hard chroming of plate: to avoid delicate products sticking and to benefit from a hard surface which allows thorough cleaning with a scrapper without the risk of the surface degrading.
- * Heated by a bank of contact elements surrounded by a stainless box with rockwool insulation.
- * Controlled by thermostat permits regulation of plate temperature from 50 to 270°C: 1 Control for 600 mm wide units.

OPTION

- * One-piece wall or central top.

ACCESSORIES

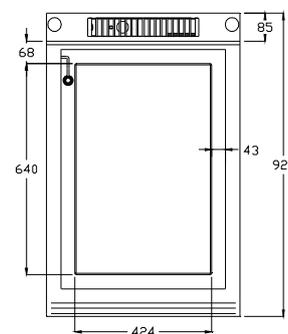
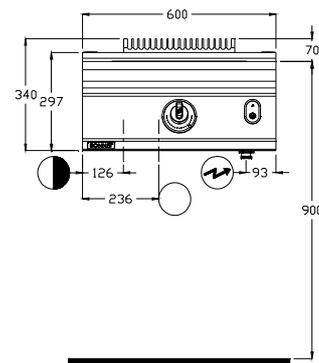
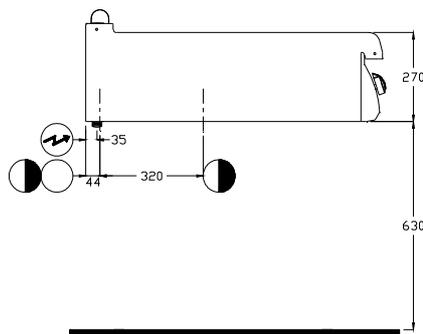
- * See technical data : General features.

STANDARDS : Compliance with standards

EN 60335-2-38: European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-838).

IP 25 and IK 9: Protection indexes.

XP U 60-010: Hygiene.

B1A9CL+6DE


-  **ELECTRICAL connection**
Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)
-  **POTABLE COLD WATER**
Water inlet at 600mm from the floor
-  **DRAIN**
Drain outlet at 535mm from the floor
Delivered with drain set up at the back of
the equipment, possibility to set up the
drain outlet pipe at the front

DIMENSIONS (mm)

Width	600
Depth x Height	920 x 340
Plate	424 x 640
Useful surface (dm ²)	27

PACKAGING (mm)

Width	740
Depth x Height	1060 x 700

WEIGHT (KG)

80

COMPOSITION OF TOP

Plate width 424	1
-----------------	---

 **ELECTRICITY** (Three-phase 230V+E or 400V+N+E)

Power (kW)	230V 3a.c.	5.4
	400V 3Na.c.	5.4
Max. Intensity (A)	230V 3a.c.	13.5
	400V 3Na.c.	7.8

 **POTABLE COLD WATER**

Pressure (Min / Max)	150/600 kPa (1.5 bars / 6 bars)
Max. temperature	30°C
Nature	Filtered to 50 microns
Connection	Flexible Ø 20/27 female (3/4")

 **DRAIN**

Connection	Smooth stainless steel tube Ø 25 + silicon tube
------------	---