




BONNET GRANDE CUISINE

Registered office:

Rue des Frères Lumière - Z.I Mitry Compans
F-77292 MITRY MORY Cedex

ADVANCIA PLUS, Gas cooking top, SMOOTH CHROMIUM PLANCHA

SMOOTH CHROMIUM PLANCHA B1A9CL+6DG




3 mm Top



FlushTop



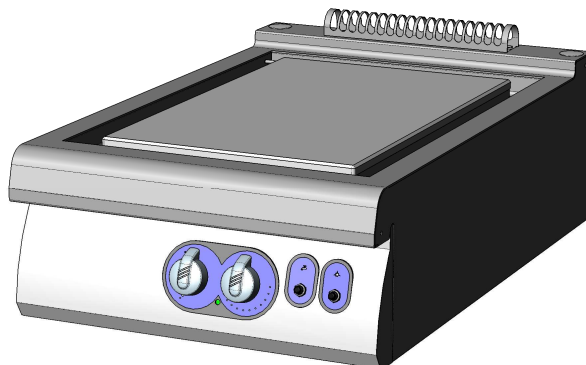CleaningSystemPlus



Start&Cook



FullPowerSystem

ADVANCIA PLUS ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

CleaningSystemPlus : Plate that is flush with the worktop fitted over a channel with continuous water flow floating the grease away.

Start&Cook : Electric spark ignition with pilot and thermocouple.

FullPowerSystem : High output micro perforated burner with integral regulation.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.

CHROMIUM PLANCHA

- * Fitted with a 15mm thick smooth Martin steel plate, providing a surface area of 27 dm², finish vibrated.
- * Hard chroming of plate: to avoid delicate products sticking and to benefit from a hard surface which allows thorough cleaning with a scraper without the risk of the surface degrading.
- * Stainless combustion chamber.
- * Heated by micro perforated 2 burners ensuring even temperature and continuous production.
- * Controlled by gas valves with a thermostat of 50 to 300°C.
- * Electric ignition via push button on the fascia.

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 203-1: European standard relating to the safety of gas appliances.

EN 203-2-9: European standard relating to the safety of gas appliances.

EN 60335-2-36: European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-836).

IP 25 et IK 9: Protection indexes.

XP U 60-010: Hygiene.



B1A9CL+6DG

GAS connection

Gas inlet at 596mm from the floor

As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request


ELECTRICAL connection

Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)


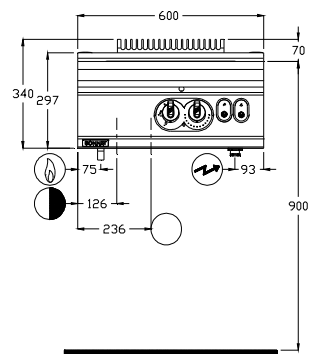
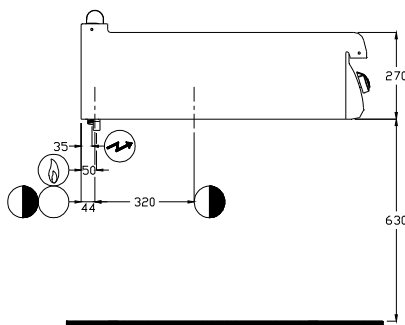

POTABLE COLD WATER

Water inlet at 600mm from the floor


DRAIN

Drain outlet at 535mm from the floor

Delivered with drain set up at the back of the equipment, possibility to set up the drain outlet pipe at the front


DIMENSIONS (mm)

Width	600
Depth x Height	920 x 340
Plate	424 x 640
Useful surface (dm ²)	27

PACKAGING (mm)

Width x Depth x Height	740 x 1060 x 700
------------------------	------------------

WEIGHT (KG)

65

COMPOSITION OF TOP

Plate width 424	1
-----------------	---


GAS

Connection Thread 15/21 mm (1/2")

Power (kW) **8.3**

G31 Propane 37^{±4}/50^{±5} mbar (kg/h) 0.65

G30 Butane 28^{±3}/50^{±5} mbar (kg/h) 0.65

G20 Natural gas 20^{±2} mbar (m³/h) 0.88

G25 Natural gas 20^{±2} mbar (m³/h) 1.00

G25 Natural gas 25^{±3} mbar (m³/h) 1.00


ELECTRICITY (kW) (Single-phase 230V)

Voltage 230Va.c.

Power (kW) 0.1


POTABLE COLD WATER

Pressure (Min / Max) 150/600 kPa (1.5 bars / 6 bars)

Max. temperature 30°C

Nature Filtered to 50 microns

Connection Flexible Ø 20/27 female (3/4")


DRAIN

Connection Smooth stainless steel tube Ø 25 + silicon tube