


ADVANCIA PLUS, Electric cooking unit, SMOOTH CHROMIUM PLANCHA on open cupboard



3 mm Top



FlushTop



CleaningSystemPlus

SMOOTH CHROMIUM PLANCHA B1A9CL+6PE



FullPowerSystem

* Shown with door
kit Accessory

ADVANCIA PLUS ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

CleaningSystemPlus : Plate that is flush with the worktop fitted over a channel with continuous water flow floating the grease away.

FullPowerSystem : Regulated cooking top.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.
- * Appliance delivered with 200mm fixed stand with 4 adjustable feet.

CHROMIUM PLANCHA

- * Fitted with a 15mm thick smooth Martin steel plate, providing a surface area of 27 dm², finish vibrated.
- * Hard chroming of plate: to avoid delicate products sticking and to benefit from a hard surface which allows thorough cleaning with a scrapper without the risk of the surface degrading.
- * Heated by a bank of contact elements surrounded by a stainless box with rockwool insulation.
- * Controlled by thermostat permits regulation of plate temperature from 50 to 270°C: 1 Control for 600 mm wide units.

OPEN CUPBOARD

- * Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips (600mm wide).

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 60335-2-38 and EN 60335- 2-49: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-838 and C 73-849).

IP 25 and IK 9: Protection indexes.

XP U 60-010: Hygiene.



BONNET GRANDE CUISINE


Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

B1A9CL+6PE

-  **ELECTRICAL connection**
Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)
-  **POTABLE COLD WATER**
Water inlet at 600mm from the floor
-  **DRAIN**
Drain outlet at 535mm from the floor
Delivered with drain set up at the back of
the equipment, possibility to set up the
drain outlet pipe inside the cupboard

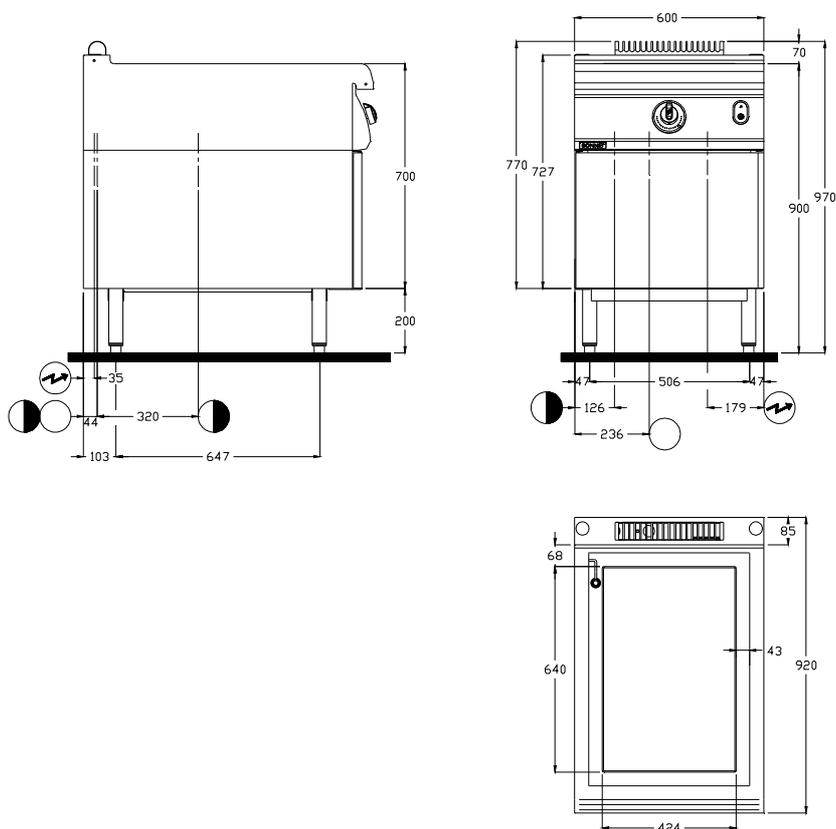

DIMENSIONS (mm)

Width	600
Depth x Height	920 x 970
Plate	424 x 640
Useful surface (dm ²)	27

PACKAGING (mm)

Width	740
Depth x Height	1060 x 1150

WEIGHT (KG)

85

COMPOSITION OF TOP

Plate width 424	1
-----------------	---

COMPOSITION OF THE BOTTOM PART

Width of cupboard	600
-------------------	-----

 **ELECTRICITY** (Three-phase 230V+E or 400V+N+E)

Appliance

Power (kW)	230V 3a.c.	5.4
	400V 3Na.c.	5.4
Max. Intensity (A)	230V 3a.c.	13.5
	400V 3Na.c.	7.8

Accessory cupboard heating kit (to be added to the total power of the appliance)

Power (kW)	230V 3a.c.	1
	400V 3Na.c.	1

 **POTABLE COLD WATER**

Pressure (Min / Max)	150/600 kPa (1.5 bars / 6 bars)
Max. temperature	30°C
Nature	Filtered to 50 microns
Connection	Flexible Ø 20/27 female (3/4")

 **DRAIN**

Connection	Smooth stainless steel tube Ø 25 + silicon tube
------------	---