



BONNET GRANDE CUISINE


Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

ADVANCIA PLUS, Electric cooking top, MIXED (smooth & ribbed) CHROMIUM PLANCHA

MIXED (smooth & ribbed) CHROMIUM PLANCHA B1A9CM+10DE



3 mm Top




FlushTop



CleaningSystemPlus



FullPowerSystem

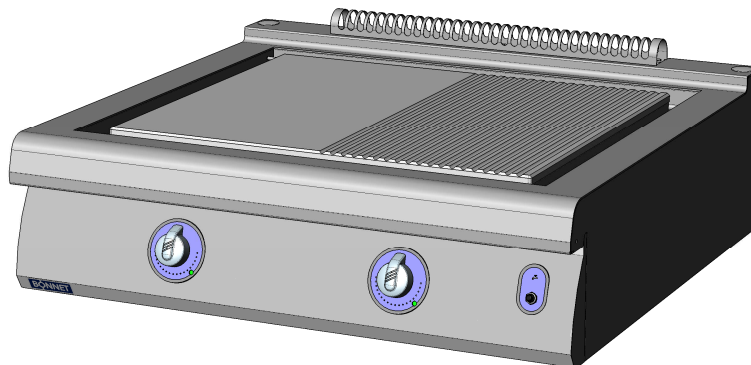

ADVANCIA PLUS ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

CleaningSystemPlus : Plate that is flush with the worktop fitted over a channel with continuous water flow floating the grease away.

FullPowerSystem : Regulated cooking top.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.

CHROMIUM PLANCHA

- * Fitted with a 15mm thick mixed (1/2 ribbed to the right) Martin steel plate, providing a surface area of 48 dm², finish vibrated.
- * Hard chroming of plate: to avoid delicate products sticking and to benefit from a hard surface which allows thorough cleaning with a scraper without the risk of the surface degrading.
- * Heated by a bank of contact elements surrounded by a stainless box with rockwool insulation.
- * Controlled by thermostat permits regulation of plate temperature from 50 to 270°C: 2 independent controls.
- * Delivered with a shaped spatula for cleaning the ribbed section.

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 60335-2-38: European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-838).

IP 25 and IK 9: Protection indexes.

XP U 60-010: Hygiene.







BONNET GRANDE CUISINE

Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

B1A9CM+10DE

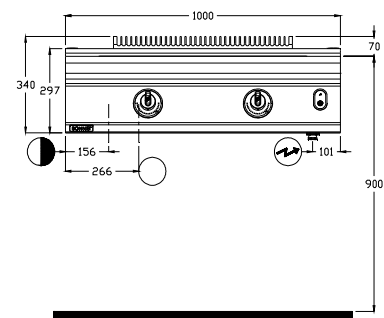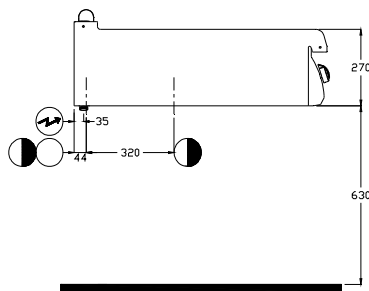

ELECTRICAL connection

Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)




POTABLE COLD WATER

Water inlet at 600mm from the floor



DRAIN

Drain outlet at 535mm from the floor
Delivered with drain set up at the back of
the equipment, possibility to set up the
drain outlet pipe at the front

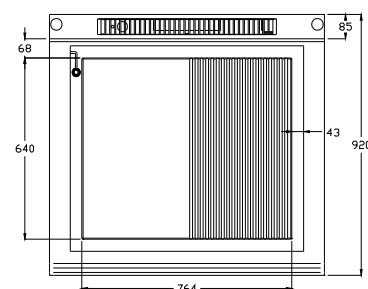

DIMENSIONS (mm)

Width	1000
Depth x Height	920 x 340
Plate	764 x 640
Useful surface (dm ²)	48

PACKAGING (mm)

Width	1140
Depth x Height	1090 x 1150

WEIGHT (KG)

140

COMPOSITION OF TOP

Plate width 764	1
-----------------	---



ELECTRICITY (Three-phase 230V+E or 400V+N+E)

Power (kW)	230V 3a.c.	10.8
	400V 3Na.c.	10.8
Max. Intensity (A)	230V 3a.c.	27.1
	400V 3Na.c.	15.6



POTABLE COLD WATER

Pressure (Min / Max)	150/600 kPa (1.5 bars / 6 bars)
Max. temperature	30°C
Nature	Filtered to 50 microns
Connection	Flexible Ø 20/27 female (3/4")



DRAIN

Connection	Smooth stainless steel tube Ø 25 + silicon tube
------------	---