



BONNET GRANDE CUISINE

Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

ADVANCIA STAR, Gas cooking unit, 2 OPEN BURNERS + SOLID TOP on open cupboard

2 OPEN BURNERS + SOLID TOP

B1A9FPx8PG



3 mm Top



EasyCleaningSystem



Start&Cook



CloseContact



ADVANCIA STAR ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

EasyCleaningSystem : Operates with a water bath.

Start&Cook : Electric spark ignition with pilot and thermocouple (solid top).

CloseContact : Burner with horizontal flame.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.
- * Appliance delivered with 200mm fixed stand with 4 adjustable feet.

OPEN BURNERS

- * Each module of 2 burners is fitted with:
 - 85mm diameter brass burner pot and head.
 - 1 nicked steel wire grid.
 - A stainless waterbath to recover any spillages and avoid them burning on.
- * Controlled by gas valve.
- * Safety thermocouple as standard.

SOLID TOP

- * Cast iron plate average thickness 10mm, size: 740 x 400 with on removable round bulls eye.
- * Stainless insulated combustion chamber forming a recovery container.
- * Heated by circular brass burner ensuring a rapid rise in the temperature of the bulls eye.
- * Controlled by gas valve.

OPEN CUPBOARD

- * Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips (800mm wide).

OPTION

- * Pilot and electric ignition for open burners module with push button on the fascia.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 203-1: European standard relating to the safety of gas appliances.

EN 203-2-1 and EN 203-2-9: European standard relating to the safety of gas appliances.

EN 60335-2-36 and EN 60335- 2-49: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-836 and C 73-849).

IP 25 et IK 9: Protection indexes.

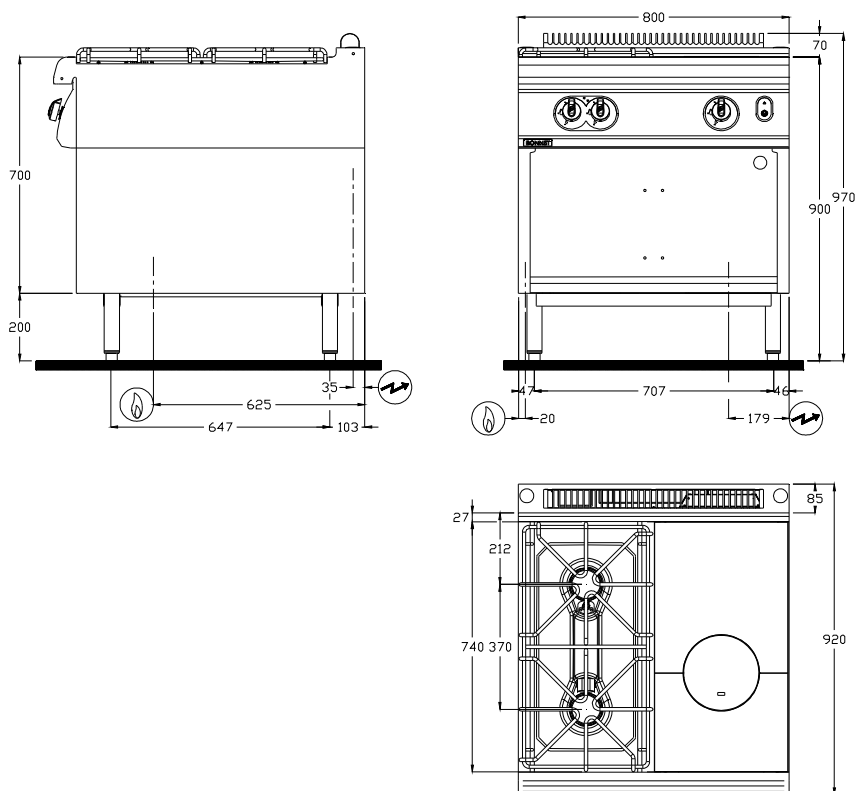
XP U 60-010: Hygiene.



B1A9FPx8PG

- GAS connection**
Gas inlet at 180mm from the floor
As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

- ELECTRICAL connection**
Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)


DIMENSIONS (mm)

Width	800
Depth x Height	920 x 970
Open burner grid	400 x 614
Solid plate	396 x 740

PACKAGING (mm)

Width x Depth x Height	940 x 1060 x 1150
------------------------	-------------------

WEIGHT (KG)

115

COMPOSITION OF TOP

Front burner 8.8 kW	1
Rear burner 5.6 kW	1
Solid plate 6.5 kW	1

COMPOSITION OF THE BOTTOM PART

Width of cupboard	800
-------------------	-----

GAS

Connection	Thread 15/21 mm (1/2")	
Power (kW)		20.9
G31 Propane	$37^{+4}/50^{+5}$ mbar (kg/h)	1.62
G30 Butane	50^{+5} mbar (kg/h)	1.65
G20 Natural gas	20^{+2} mbar (m ³ /h)	2.21
G25 Natural gas	20^{+2} mbar (m ³ /h)	2.51
G25 Natural gas	25^{+3} mbar (m ³ /h)	2.51
Power (kW)		16.3
G30 Butane	$28^{+3}/30^{+3}$ mbar (kg/h)	1.29

ELECTRICITY (kW) (Single-phase 230V)

Power (kW)	230V a.c.	0.1
Option Electric ignition		0.1
Accessory cupboard heating kit		2