



BONNET GRANDE CUISINE

Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

ADVANCIA, Electric fryers, 15 LITERS table top

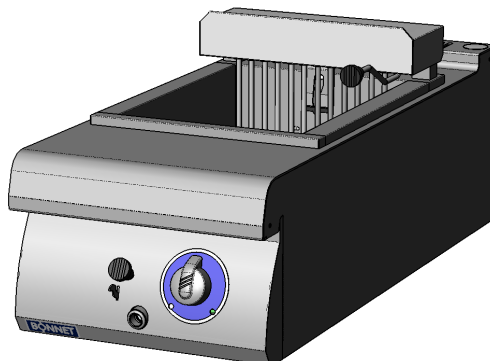
15 LITERS
B1A9FR15DE



3 mm Top



FlushTop



ADVANCIA ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.

FRYERS

- * This 400mm wide fryer has a one piece tank with cool zone with a nominal capacity of 15 litres.
- * It is fitted with low power density armoured elements to ensure optimum oil service life.
- * The group of hinged elements has a handle and can be locked in the raised position whilst cleaning. Power to the elements is cut off when they are lifted.
- * The tank has electronic control from 140° to 180°C with solid oil melt position and a positive high limit safety stat at 205°C and an indicator light to guarantee safety of use.
- * An indicator light shows when the oil has reached the set temperature.
- * The well is drained by a ball valve controlled from the fascia.
- * Supplied with a lift off lid.
- * Designed to comply with hygiene and safety norms.
- * Supplied with two 125 x 280 x 130mm half baskets, a base plate and a drain bucket with filter.

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 60335-2-37: European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-837).

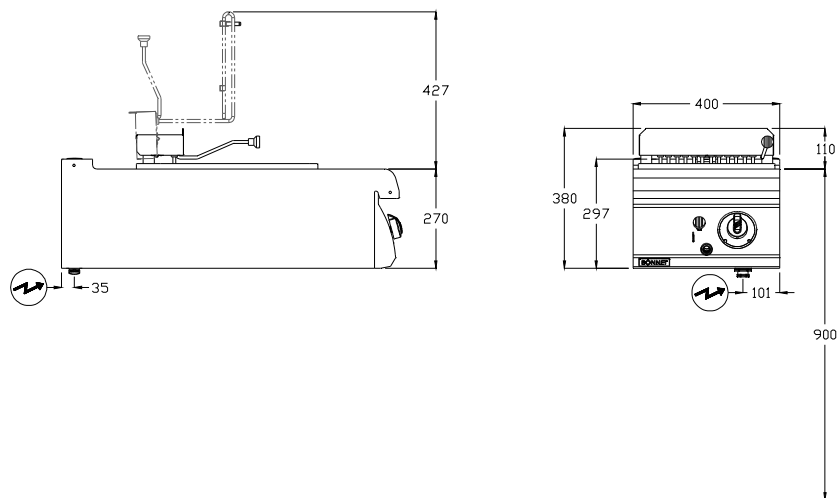
IP 25 and IK 9: Protection indexes.

XP U 60-010: Hygiene.

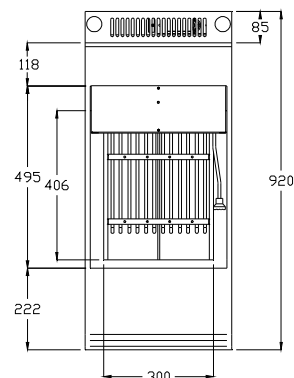


**BONNET GRANDE CUISINE****Registered office:**

Rue des Frères Lumière - Z.I Mitry Compans
F-77292 MITRY MORY Cedex

B1A9FR15DE**ELECTRICAL connection**

Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)

**DIMENSIONS (mm)**

Width	400
Depth x Height	920 x 380
½ basket	125 x 280 x 130
Basket	270 x 280 x 130

CAPACITIES

Tank (liter)	13
½ basket (kg)	0.65
Basket (kg)	1.25

PACKAGING (mm)

Width x Depth x Height	540 x 1060 x 700
------------------------	------------------

WEIGHT (KG)

50

**ELECTRICITY** (Three-phase 230V+E or 400V+N+E)

Power (kW)	230V 3a.c.	12
	400V 3Na.c.	12
Max. Intensity (A)	230V 3a.c.	31.7
	400V 3Na.c.	17.4

HOURLY RATED PRODUCTION (kg/h)

Frozen fries according to NFD 40002	25
Frozen fries 6 x 6 (Practical production)	36
Poaching fresh fries according to NFD 32725	30
Fresh fries: second cooking	45

OPERATING TEMPERATURE

140 to 180°C

SAFETY WORKING TEMPERATURE

205°C