


ADVANCIA, Gas cooking unit, 2 OPEN BURNERS on open cupboard

**3 mm Top****EasyCleaningSystem****CloseContact**

2 OPEN BURNERS B1A9FV4PG

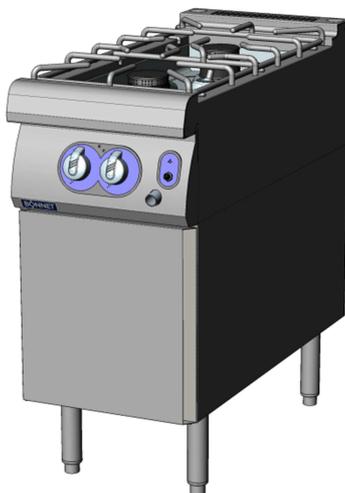

* Shown with door
kit Accessory

ADVANCIA ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

EasyCleaningSystem : Operates with a water bath draining to the front.

CloseContact : Burner with horizontal flame.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.
- * Appliance delivered with 200mm fixed stand with 4 adjustable feet.

OPEN BURNERS

- * Each module of 2 burners is fitted with:
 - Pots and heads of open burners in brass, diameter 85 mm.
 - 1 stainless steel wire grid.
 - A stainless waterbath with back overflow plug to recover any spillages and avoid them burning on.
 - Waterbath drain on the fascia
- * Controlled by gas valve.
- * Safety thermocouple as standard.

OPEN CUPBOARD

- * Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips (400mm wide).

OPTIONS

- * One-piece wall or central top.
- * Pilot and electric ignition with push button on the fascia.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 203-1: European standard relating to the safety of gas appliances.

EN 203-2-1: European standard relating to the safety of gas appliances.

EN 60335-2-36 and EN 60335- 2-49: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-836 and C 73-849).

IP 25 et IK 9: Protection indexes.


XP U 60-010: Hygiene.



BONNET GRANDE CUISINE

Registered office:
Rue des Frères Lumière - Z.I Mitry Compans
F-77292 MITRY MORY Cedex

B1A9FV4PG

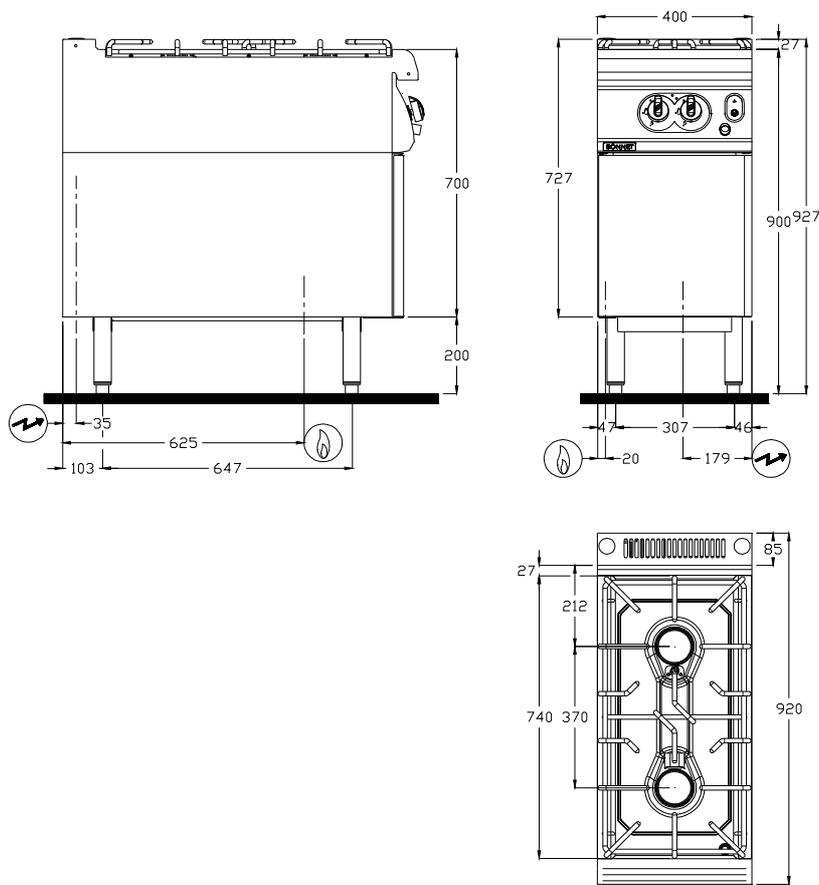

- Ⓒ GAS connection**
Gas inlet at 180mm from the floor
As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request
- Ⓒ ELECTRICAL connection**
Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)

DIMENSIONS (mm)

Width	400
Depth x Height	920 x 927
Open burner grid	400 x 740

PACKAGING (mm)

Width x Depth x Height	540 x 1060 x 1150
------------------------	-------------------

WEIGHT (KG)

70

COMPOSITION OF TOP

Front burner 8.8 kW	1
Rear burner 5.6 kW	1

COMPOSITION OF THE BOTTOM PART

Width of cupboard	400
-------------------	-----

Ⓒ GAS

Connection	Thread 15/21 mm (1/2")	
Power (kW)		14.4
G31 Propane	37 ^{±4} /50 ^{±5} mbar (kg/h)	1.12
G30 Butane	50 ^{±5} mbar (kg/h)	1.14
G20 Natural gas	20 ^{±2} mbar (m ³ /h)	1.52
G25 Natural gas	20 ^{±2} mbar (m ³ /h)	1.73
G25 Natural gas	25 ^{±3} mbar (m ³ /h)	1.73
Power (kW)		11.2
G30 Butane	28 ^{±3} /30 ^{±3} mbar (kg/h)	0.88

Ⓒ ELECTRICITY (kW) (Single-phase 230V)

Option electrical ignition	0.1
Accessory cupboard heating kit	1

☉ DRAIN

On front