



BONNET GRANDE CUISINE

Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

ADVANCIA, Gas cooking unit, 4 OPEN BURNERS on open cupboard



3 mm Top



EasyCleaningSystem



CloseContact

4 OPEN BURNERS B1A9FV8PG



** Shown with door
kit Accessory*

ADVANCIA ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

EasyCleaningSystem : Operates with a water bath draining to the front.

CloseContact : Burner with horizontal flame.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.
- * Appliance delivered with 200mm fixed stand with 4 adjustable feet.

OPEN BURNERS

- * Each module of 4 burners is fitted with:
 - Pots and heads of open burners in brass, diameter 85 mm.
 - 2 stainless steel wire grids.
 - A stainless waterbath with back overflow plug to recover any spillages and avoid them burning on.
 - Waterbath drain on the fascia
- * Controlled by gas valve.
- * Safety thermocouple as standard.

OPEN CUPBOARD

- * Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips (800mm wide).

OPTIONS

- * One-piece wall or central top.
- * Pilot and electric ignition with push button on the fascia.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 203-1: European standard relating to the safety of gas appliances.

EN 203-2-1: European standard relating to the safety of gas appliances.

EN 60335-2-36 and EN 60335- 2-49: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-836 and C 73-849).

IP 25 et IK 9: Protection indexes.

XP U 60-010: Hygiene.




B1A9FV8PG

GAS connection

Gas inlet at 180mm from the floor
As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

ELECTRICAL connection

Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)

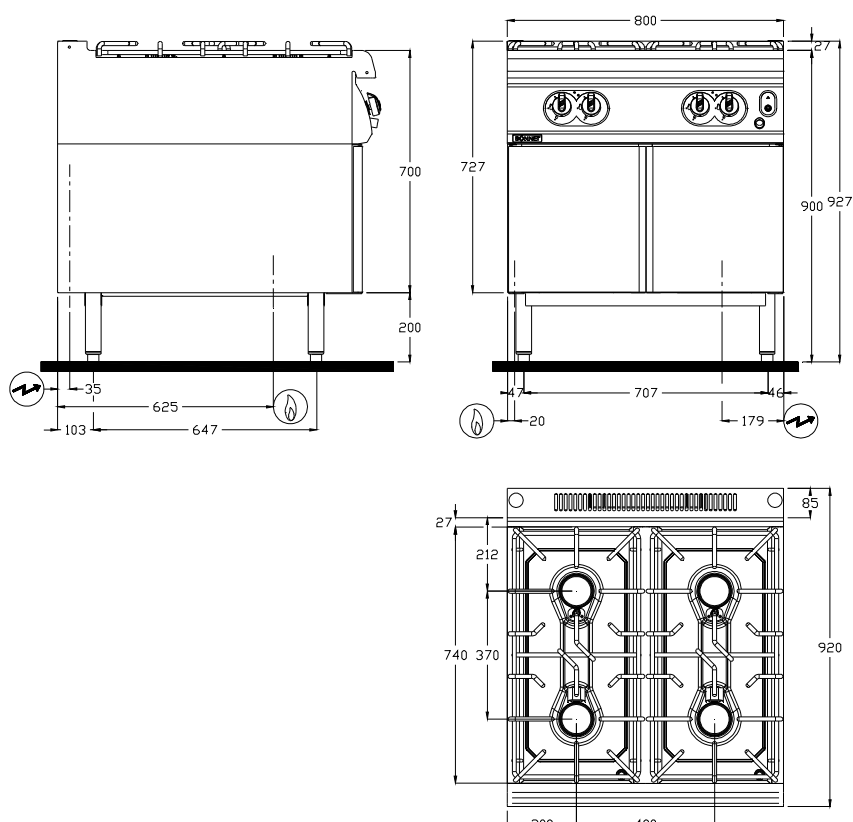

DIMENSIONS (mm)

Width	800
Depth x Height	920 x 927
Open burner grid	400 x 740

PACKAGING (mm)

Width	940
Depth x Height	1060 x 1150

WEIGHT (KG)

115

COMPOSITION OF TOP

Front burner 8.8 kW	2
Rear burner 5.6 kW	2

COMPOSITION OF THE BOTTOM PART

Width of cupboard	800
-------------------	-----

GAS

Connection Thread 15/21 mm (1/2")

Power (kW)

28.8

G31 Propane $37^{+4}/50^{+5}$ mbar (kg/h) 2.24

G30 Butane 50^{+5} mbar (kg/h) 2.27

G20 Natural gas 20^{+2} mbar (m³/h) 3.05

G25 Natural gas 20^{+2} mbar (m³/h) 3.46

G25 Natural gas 25^{+3} mbar (m³/h) 3.46

Power (kW)

22.4

G30 Butane $28^{+3}/30^{+3}$ mbar (kg/h) 1.77

ELECTRICITY (kW) (Single-phase 230V)

Option Electric ignition 0.1

Accessory electrical ignition 2

DRAIN

On front