



BONNET GRANDE CUISINE


Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

ADVANCIA PLUS, Gas cooking top, 4 OPEN BURNERS

4 OPEN BURNERS
B1A9FV+10DG




3 mm Top



FlushTop



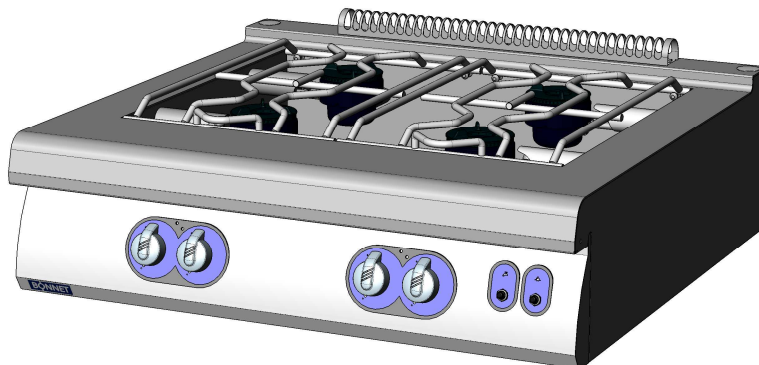CleaningSystemPlus



Start&Cook



CloseContactPlus

ADVANCIA PLUS ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

CleaningSystemPlus : Removable burner cantilevered over a water bath with drain connection.

Start&Cook : Electric spark ignition with pilot and thermocouple.

CloseContactPlus : Patented burner with horizontal flame.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.

OPEN BURNERS

- * Horizontal burner flame for flexibility and high output throughout the entire range of adjustment.
- * Pots and heads of open burners in polished chromium-plated brass, diameter 115mm.
- * 1 or 2 stainless steel wire grids on high for better combustion.
- * Pilot flame protection.
- * Power of front open burners : 8.8 or 6 kW.
- * Power of rear open burners : 6 kW.
- * Controlled by gas valve, with pilot and safety thermocouple as standard.
- * Patented burner fully removeable.

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 203-1 : European standard relating to the safety of gas appliances.

EN 203-2-1 : European standard relating to the safety of gas appliances.

EN 60335-2-36 : European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-836 and C 73-849).

IP 25 et IK 9 : Protection indexes.

XP U 60-010 : Hygiene.



B1A9FV+10DG
GAS connection

Gas inlet at 590mm from the floor
As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

ELECTRICAL connection

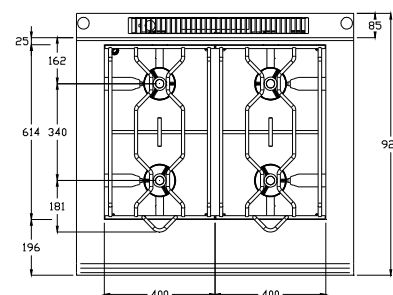
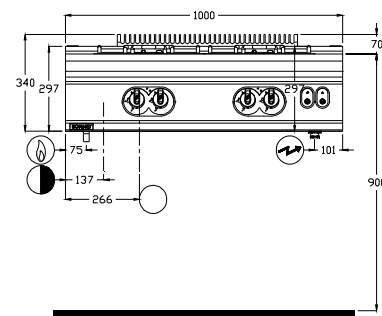

Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)

POTABLE COLD WATER

Water inlet at 600mm from the floor

DRAIN

Drain outlet at 535mm from the floor
Delivered with drain set up at the back of the equipment, possibility to set up the drain outlet pipe at the front


DIMENSIONS (mm)

Width x Depth x Height

1000 x 920 x 340

Open burner grid

400 x 614

PACKAGING (mm)

Width x Depth x Height

1140 x 1090 x 700

WEIGHT (KG)

100

COMPOSITION OF TOP

Front burner 8.8 or 6 kW

2

Rear burner 6 kW

2

GAS

Connection

Thread 15/21 mm (1/2")

Power (kW)

29.6

G31 Propane 37^{±4}/50^{±5} mbar (kg/h)

2.30

G30 Butane 50^{±5} mbar (kg/h)

2.33

G20 Natural gas 20^{±2} mbar (m³/h)

3.12

G25 Natural gas 20^{±2} mbar (m³/h)

3.56

G25 Natural gas 25^{±3} mbar (m³/h)

3.56

Power (kW)

24

G30 Butane 28^{±3}/30^{±3} mbar (kg/h)

1.89

ELECTRICITY (kW) (Single phase 230V)

Power (kW) 230V a.c.

0.1

Option Electric ignition

0.1

POTABLE COLD WATER

Pressure (Min / Max)

150/600 kPa (1.5 bars / 6 bars)

Max temperature

30°C

Nature

Filtered to 50 microns

Connection

Flexible Ø 20/27 female (3/4")

DRAIN

Connection

Smooth stainless steel tube Ø 25 + silicon tube