



**BONNET GRANDE CUISINE**


**Registered office:**

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

## **ADVANCIA PLUS, Gas cooking unit, 4 OPEN BURNERS on open cupboard**

### **4 OPEN BURNERS B1A9FV+10PG**



3 mm Top



FlushTop



CleaningSystemPlus



Start&Cook



CloseContactPlus

*\* Shown with door  
kit Accessory*

### **ADVANCIA PLUS ASSETS**

**3mmTop** : One piece 3mm thick stainless steel structure.

**FlushTop** : Module can be butt jointed.

**CleaningSystemPlus** : Removable burner cantilevered over a water bath with drain connection.

**Start&Cook** : Electric spark ignition with pilot and thermocouple.

**CloseContactPlus** : Patented burner with horizontal flame.

### **GENERAL**

- \* All stainless steel construction designed to avoid any infiltration.
- \* Unfailing sturdy equipment for direct wall fixation.
- \* Controls grouped together and recessed protecting them for impact and spillages.
- \* Appliance delivered with 200mm fixed stand with 4 adjustable feet.

### **OPEN BURNERS**

- \* Horizontal burner flame for flexibility and high output throughout the entire range of adjustment.
- \* Pots and heads of open burners in polished chromium-plated brass, diameter 115mm.
- \* 1 or 2 stainless steel wire grids on high for better combustion.
- \* Pilot flame protection.
- \* Power of front open burners : 8.8 or 6 kW.
- \* Power of rear open burners : 6 kW.
- \* Controlled by gas valve, with pilot and safety thermocouple as standard.
- \* Patented burner fully removeable.

### **OPEN CUPBOARD**

- \* Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips (1000mm wide).

### **OPTION**

- \* One-piece wall or central top.

### **ACCESSORIES**

- \* See technical data : General features.

### **STANDARDS : Compliance with standards**

**EN 203-1** : European standard relating to the safety of gas appliances.

**EN 203-2-1** : European standard relating to the safety of gas appliances.

**EN 60335-2-36 and EN 60335- 2-49** : European standards relating to the safety of electric appliances. (French standards: Classification index C 73-836 and C 73-849).

**IP 25 et IK 9** : Protection indexes.

**XP U 60-010** : Hygiene.



**B1A9FV+10PG**
**GAS connection**

Gas inlet at 180mm from the floor  
As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

**ELECTRICAL connection**

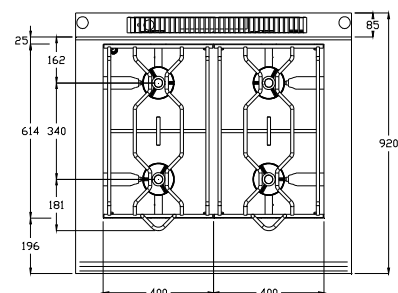
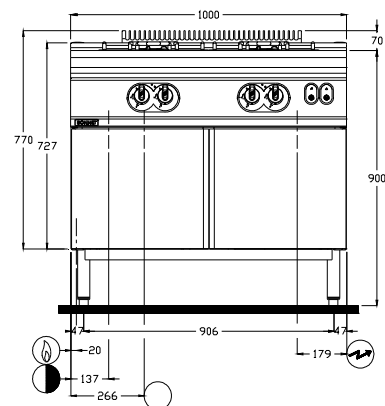
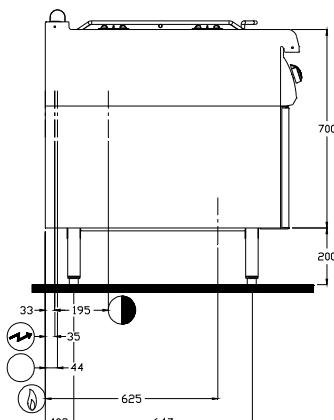
Electric inlet at 615mm from the floor  
(Flexible cable 1.5 m in length)

**POTABLE COLD WATER**

Water inlet at 600mm from the floor

**DRAIN**

Drain outlet at 535mm from the floor  
Delivered with drain set up at the back of the equipment, possibility to set up the drain outlet pipe inside the cupboard


**DIMENSIONS (mm)**

Width x Depth x Height

1000 x 920 x 970

Open burner grid

400 x 614

**PACKAGING (mm)**

Width x Depth x Height

1140 x 1090 x 1150

**WEIGHT (KG)**

100

**COMPOSITION OF TOP**

Front burner 8.8 or 6 kW

2

Rear burner 6 kW

2

**COMPOSITION OF THE BOTTOM PART**

Width of cupboard

1000

**GAS**

Connection

Thread 15/21 mm

**Power (kW)**

**29.6**

G31 Propane 37<sup>±4</sup>/50<sup>±5</sup> mbar (kg/h)

2.30

G30 Butane 50<sup>±5</sup> mbar (kg/h)

2.33

G20 Natural gas 20<sup>±2</sup> mbar (m<sup>3</sup>/h)

3.12

G25 Natural gas 20<sup>±2</sup> mbar (m<sup>3</sup>/h)

3.64

G25 Natural gas 25<sup>±3</sup> mbar (m<sup>3</sup>/h)

3.26

**Power (kW)**

**24**

G30 Butane 28<sup>±3</sup>/30<sup>±3</sup> mbar (kg/h)

1.89

**ELECTRICITY (kW) (Single-phase 230V)**

Option Electric ignition

0.1

Accessory cupboard heating kit

2

**POTABLE COLD WATER**

Pressure (Min / Max)

150/600 kPa (1.5 bars / 6 bars)

Max temperature

30°C

Nature

Filtered to 50 microns

Connection

Flexible Ø 20/27 female (3/4")

**DRAIN**

Connection

Smooth stainless steel tube Ø 25 + silicon tube