


ADVANCIA PLUS, Electric cooking top, SMOOTH PLANCHA

SMOOTH PLANCHA B1A9PL+10DE



3 mm Top



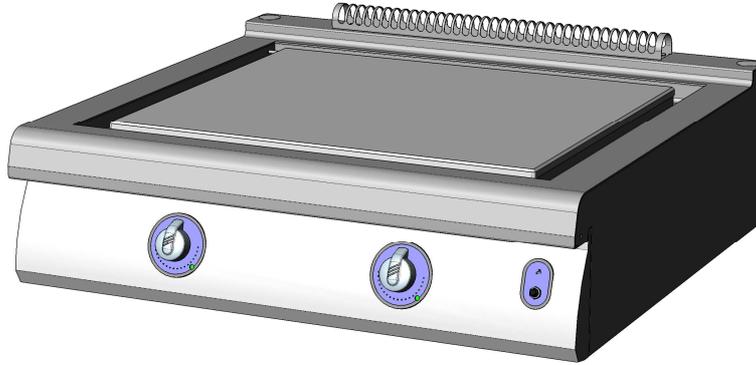
FlushTop



CleaningSystemPlus



FullPowerSystem



ADVANCIA PLUS ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

CleaningSystemPlus : Plate that is flush with the worktop fitted over a channel with continuous water flow floating the grease away.

FullPowerSystem : Regulated cooking top.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.

PLANCHA

- * Fitted with a 15mm thick smooth Martin steel plate, providing a surface area of 48 dm², finish vibrated.
- * Heated by a bank of contact elements surrounded by a stainless box with rockwool insulation.
- * Controlled by thermostat permits regulation of plate temperature from 50 to 270°C: 2 independent controls.

OPTION

- * One-piece wall or central top.

ACCESSORIES

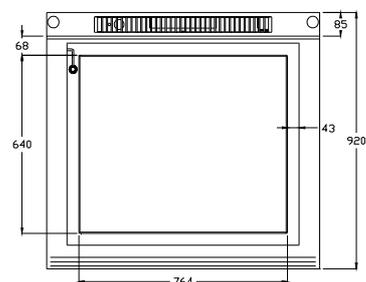
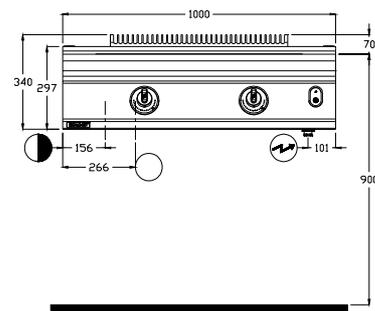
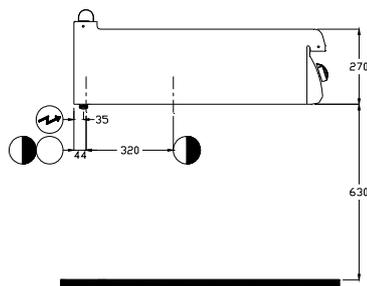
- * See technical data : General features.

STANDARDS : Compliance with standards

EN 60335-2-38: Norme européenne relative à la sécurité des appareils électriques.
(Norme Française: indice de classement C 73-838).

IP 25 et IK 9: Indices de Protection.

XP U 60-010: Hygiène.

B1A9PL+10DE


-  **ELECTRICAL connection**
Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)
-  **POTABLE COLD WATER**
Water inlet at 600mm from the floor
-  **DRAIN**
Drain outlet at 535mm from the floor
Delivered with drain set up at the back of
the equipment, possibility to set up the
drain outlet pipe at the front

DIMENSIONS (mm)

Width	1000
Depth x Height	920 x 340
Plate	764 x 640
Useful surface (dm ²)	48

PACKAGING (mm)

Width	1140
Depth x Height	1090 x 700

WEIGHT (KG)

140

COMPOSITION OF TOP

Plate width 764	1
-----------------	---

 **ELECTRICITY** (Three-phase 230V+E or 400V+N+E)

Power (kW)	230V 3a.c.	10.8
	400V 3Na.c.	10.8
Max. Intensity (A)	230V 3a.c.	27.1
	400V 3Na.c.	15.6

 **POTABLE COLD WATER**

Pressure (Min / Max)	150/600 kPa (1.5 bars / 6 bars)
Max temperature	30°C
Nature	Filtered to 50 microns
Connection	Flexible Ø 20/27 female (3/4")

 **DRAIN**

Connection	Smooth stainless steel tube Ø 25 + silicon tube
------------	---