


ADVANCIA PLUS, Gas cooking top, SMOOTH PLANCHA

SMOOTH PLANCHA B1A9PL+10DG



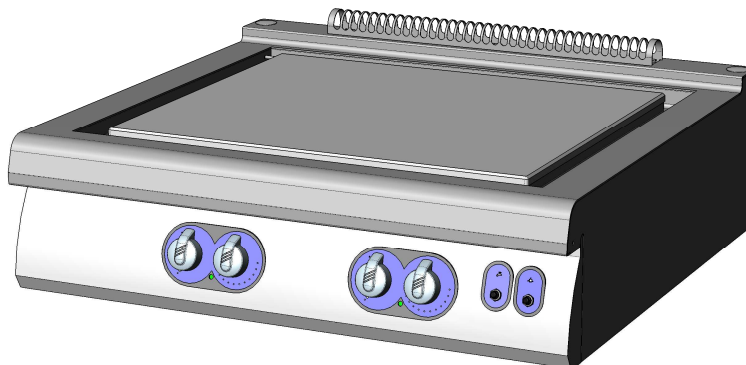
3 mm Top



FlushTop



CleaningSystemPlus



Start&Cook



FullPowerSystem

ADVANCIA PLUS ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

CleaningSystemPlus : Plate that is flush with the worktop fitted over a channel with continuous water flow floating the grease away.

Start&Cook : Electric spark ignition with pilot and thermocouple.

FullPowerSystem : High output micro perforated burner with integral regulation.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.

PLANCHA

- * Fitted with a 15mm thick smooth Martin steel plate, providing a surface area of 48 dm², finish vibrated.
- * Stainless combustion chamber.
- * Heated by micro perforated 4 burners ensuring even temperature and continuous production.
- * Controlled by gas valves with a thermostat of 50 to 300°C. 2 independent controls.
- * Electric ignition via push button on the fascia.

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 203-1: European standard relating to the safety of gas appliances.

EN 203-2-9: European standard relating to the safety of gas appliances.

EN 60335-2-36: European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-836).

IP 25 et IK 9: Protection indexes.

XP U 60-010: Hygiene.

B1A9PL+10DG
GAS connection

Gas inlet at 180mm from the floor
As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

ELECTRICAL connection

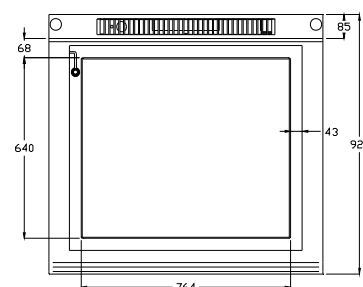
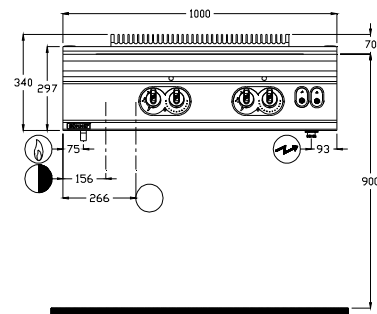
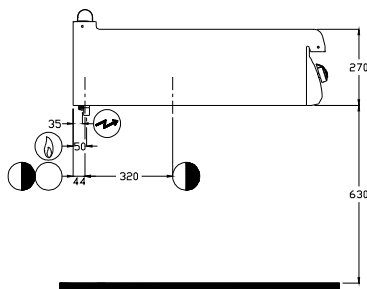
Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)

POTABLE COLD WATER

Water inlet at 600mm from the floor

DRAIN

Drain outlet at 535mm from the floor
Delivered with drain set up at the back of the equipment, possibility to set up the drain outlet pipe at the front


DIMENSIONS (mm)

Width	1000
Depth x Height	920 x 340
Plate	764 x 640
Useful surface (dm ²)	48

PACKAGING (mm)

Width	1140
Depth x Height	1090 x 700

WEIGHT (KG)

117

COMPOSITION OF TOP

Plate width 764	1
-----------------	---

GAS

Connection Thread 15/21 mm (1/2")

Power (kW) **16.6**

G31 Propane $37^{+4}/50^{+5}$ mbar (kg/h) 1.29

G30 Butane $28^{+3}/50^{+5}$ mbar (kg/h) 1.31

G20 Natural gas 20^{+2} mbar (m³/h) 1.76

G25 Natural gas 20^{+2} mbar (m³/h) 2

G25 Natural gas 25^{+3} mbar (m³/h) 2

ELECTRICITY (kW) (Single-phase 230V)

Voltage 230V a.c.

Power (kW) 0.1

POTABLE COLD WATER

Pressure (Min / Max) 150/600 kPa (1.5 bars / 6 bars)

Max temperature 30°C

Nature Filtered to 50 microns

Connection Flexible Ø 20/27 female (3/4")

VIDANGE

Connection Smooth stainless steel tube Ø 25 + silicon tube