

ADVANCIA, Gas cooking top, RIBBED PLANCHA

RIBBED PLANCHA B1A9PR8DG



3 mm Top



FlushTop



EasyCleaningSystem



Start&Cook



ADVANCIA ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

EasyCleaningSystem : Cooking juices recovered via a removable container in the fascia.

Start&Cook : Electric spark ignition with pilot and thermocouple.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.

PLANCHA

- * Fitted with a 15mm thick ribbed Martin steel plate, 735mm deep.
- * Stainless combustion chamber.
- * Heated by micro perforated 4 burners ensuring even temperature and continuous production.
- * Controlled by gas valves with a thermostat of 100 to 350°C. 2 independent controls.
- * A channel for collecting the cooking juice at the front of the plate.
- * Delivered with a shaped spatula for cleaning the ribbed section.

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

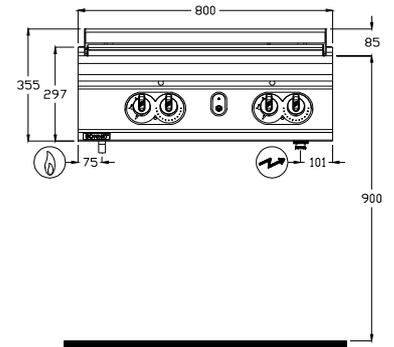
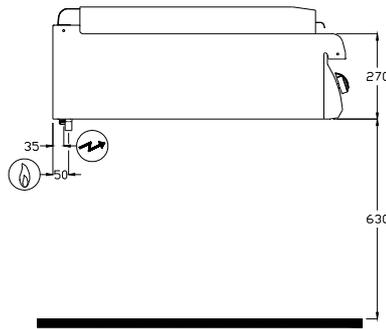
EN 203-1: European standard relating to the safety of gas appliances.

EN 203-2-9: European standard relating to the safety of gas appliances.

EN 60335-2-36: European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-836).

IP 25 et IK 9: Protection indexes.

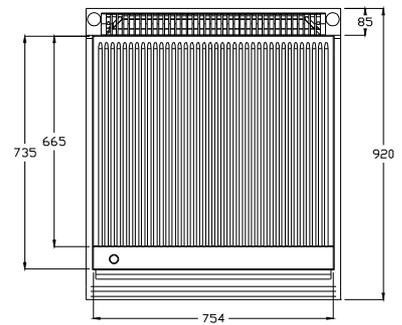
XP U 60-010: Hygiene.

B1A9PR8DG

Ⓒ GAS connection

Gas inlet at 180mm from the floor
As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

Ⓓ ELECTRICAL connection

Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)


DIMENSIONS (mm)

Width	800
Depth x Height	920 x 355
Plate	754 x 735
Useful surface (dm ²)	50

PACKAGING (mm)

Width	940
Depth x Height	1060 x 700

WEIGHT (KG)

110

COMPOSITION OF TOP

Plate width 754	1
-----------------	---

Ⓒ GAS

Connection		Thread 15/21 mm
Power (kW)		16.6
G31 Propane	37 ^{±4} /50 ^{±5} mbar (kg/h)	1.29
G30 Butane	28 ^{±3} /50 ^{±5} mbar (kg/h)	1.31
G20 Natural gas	20 ^{±2} mbar (m ³ /h)	1.76
G25 Natural gas	20 ^{±2} mbar (m ³ /h)	2.00
G25 Natural gas	25 ^{±3} mbar (m ³ /h)	2.00

Ⓓ ELECTRICITY (kW) (Single-phase 230V)

Voltage	230V a.c.
Power (kW)	0.1