

## OPTIMUM, Electric cooking top, SMOOTH CHROMIUM PLANCHA



FlushTop



EasyCleaningSystem

### SMOOTH CHROME PLANCHA B1O7CL4DE



### OPTIMUM ASSETS

**FlushTop** : Module can be butt jointed.

**EasyCleaningSystem** : Cooking juices recovered via a removable container in the fascia.

### GENERAL

- \* Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- \* All stainless steel construction designed to avoid any infiltration.
- \* Unfailing sturdy equipment for direct wall fixation.
- \* Controls grouped together and recessed protecting them for impact and spillages.

### CHROMIUM PLANCHA

- \* Fitted with a 15mm thick smooth Martin steel plate, 545mm deep.
- \* Hard chroming of plate: to avoid delicate products sticking and to benefit from a hard surface which allows thorough cleaning with a scrapper without the risk of the surface degrading.
- \* Heated by a bank of contact elements surrounded by a stainless box with rockwool insulation.
- \* Controlled by thermostat permits regulation of plate temperature from 50 to 270°C: 1 Control for 400 mm wide units.
- \* A channel for collecting the cooking juice at the front of the plate.

### OPTION

- \* One-piece wall or central top.

### ACCESSORIES

- \* See technical data : General features.

### STANDARDS : Compliance with standards

**EN 60335-2-38**: European standards relating to the safety of electric appliances.  
(French standards: Classification index C 73-838).

**IP 25 and IK 9**: Protection indexes.


**XP U 60-010**: Hygiene.




**BONNET GRANDE CUISINE**

**Registered office:**  
Rue des Frères Lumière - Z.I Mitry Compans  
F-77292 MITRY MORY Cedex

**B107CL4DE**

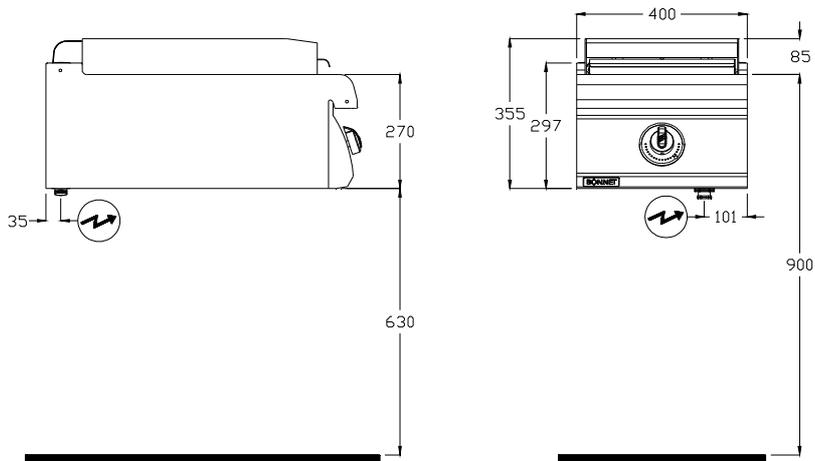

 **ELECTRICAL connection**  
Electric inlet at 615mm from the floor  
(Flexible cable 1.5 m in length)

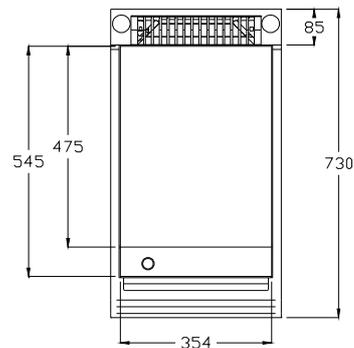

**DIMENSIONS (mm)**

Width	400
Depth x Height	730 x 355
Plate	354 x 545
Useful surface (dm <sup>2</sup> )	17

**PACKAGING (mm)**

Width	540
Depth x Height	1060 x 700

**WEIGHT (KG)**

50

**COMPOSITION OF TOP**

Plate width 354	1
-----------------	---

 **ELECTRICITY** (Three-phase 230V+E or 400V+N+E)

Power (kW)	230V 3a.c.	3.9
	400V 3Na.c.	3.9
Max. Intensity(A)	230V 3a.c.	9.8
	400V 3Na.c.	5.7