

OPTIMUM, Electric cooking unit, PASTA COOKER on cupboard




FlushTop



EasyCleaningSystem

PASTA COOKER B107CP4PE

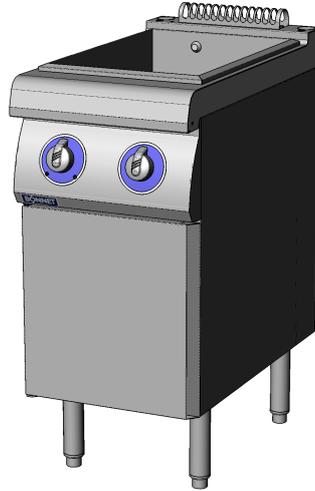

OPTIMUM ASSETS

FlushTop : Module can be butt jointed.

EasyCleaningSystem : Can be plumbed to waste.

GENERAL

- * Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.
- * Appliance delivered with 200mm fixed stand with 4 adjustable feet.

PASTA COOKER

- * The pasta cooker comprises a 20 litre one piece welded stainless well.
- * It is fitted with a 9kW Incoloy immersion heater protected by a safety thermostat
- * Controlled by simmerstat and with a heat indicator and boil dry safety system
- * A water spout at the rear controlled by a 3-position switch on the fascia allows filling and for starch to be skimmed on a wave of water towards the filter zone located at the front and plumbed to waste.
- * The well is drained by a ball valve accessed via the cupboard.
- * 1 door 400mm wide hinged to the left, double skinned stainless with magnetic closure and insulated handle.
- * Designed to comply with hygiene and safety norms.
- * Supplied:
 - With a drain system set up in the cupboard which allows the drain to be connected at the back of the equipment.
 - Without baskets.

OPTION

- * One-piece wall or central top.
- * Simultaneous automatic basket lift.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards


EN 60335-2-47: European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-847).

IP 25 and IK 9: Protection indexes.

XP U 60-010: Hygiene.

B107CP4PE

-  **ELECTRICAL connection**
Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)
-  **POTABLE WATER**
Water inlet at 495mm from the floor
-  **DRAIN (rear of unit)**
Drain outlet at 210mm from the floor

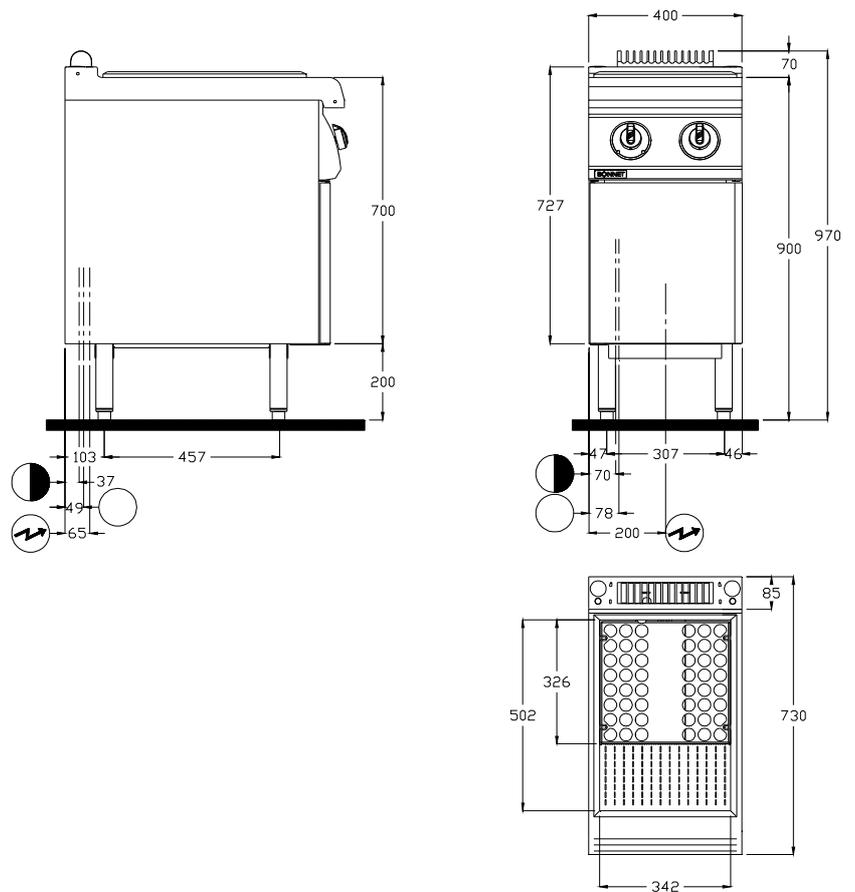
DIMENSIONS (mm)

Width	400
Depth x Height	730 x 970

CAPACITY (mm)

Tank (liter)	20
--------------	----

PACKAGING (mm)

Width	540
Depth x Height	1060 x 1150

WEIGHT (KG)

55

 **ELECTRICITY** (Three-phase 230V+E or 400V+N+E)

Power (kW)	230V 3a.c.	9
	400V 3Na.c.	9
Max. Intensity(A)	230V 3a.c.	22.6
	400V 3Na.c.	13

 **POTABLE WATER**

Pressure (Min / Max)	150/600 kPa (1.5 bars / 6 bars)
Max. temperature	60°C
Nature	Filtered to 50 microns
Connection	Ø 20/27 (3/4")

 **DRAIN** (rear of unit)

Connection	Stainless steel diameter 35 tube + Copper elbow diameter 35mm
------------	---

SAFETY FONCTIONING

Heating without water

APPLIANCE TYPE

Free standing (against a wall or other appliance)