



**BONNET GRANDE CUISINE**

**Registered office:**

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

## OPTIMUM, Electric cooking unit, 4 ELECTRIC RINGS on electric oven



FlushTop



AirFlexSystem

### 4 ELECTRIC RINGS B1O7PE8FE



### OPTIMUM ASSETS

**FlushTop** : Module can be butt jointed.

**AirFlexSystem** : Convected air onto 3 levels.

### GENERAL

- \* Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- \* All stainless steel construction designed to avoid any infiltration.
- \* Unfailing sturdy equipment for direct wall fixation.
- \* Controls grouped together and recessed protecting them for impact and spillages.
- \* Appliance delivered with 200mm fixed stand with 4 adjustable feet.

### ELECTRIC RINGS

- \* One piece pressed top fitted with 4 cast iron rapid heat rings 220mm diameter.
- \* Each ring is controlled by a 6 position switch and has an indicator light.
- \* High limit thermostat built into each ring.

### ELECTRIC OVEN

- \* The GN2/1 (530 x 650mm) oven cavity has a steel base, removable side runners and is insulated with rockwool.
- \* Heavy duty door with integral hinges that are spring counterbalanced, fitted with an insulated handle. Seal is high temperature silicone.
- \* Controlled by 4 position switch: Off, Top, Bottom or Both, 50/300°C thermostat and indicator light.
- \* Safety thermostat at 400°C.
- \* The oven is supplied with a nickelled GN 2/1 grill and a 40mm deep GN 2/1 tray Gastronorm.

### ACCESSORIES

- \* See technical data : General features.

### STANDARDS : Compliance with standards

**EN 60335-2-36**: European standards relating to the safety of electric appliances.

(French standards: Classification index C 73-836).

**IP 25 and IK 9**: Protection indexes.

**XP U 60-010**: Hygiene.






**BONNET GRANDE CUISINE**

**Registered office:**  
Rue des Frères Lumière - Z.I Mitry Compans  
F-77292 MITRY MORY Cedex

**B107PE8FE**

 **ELECTRICAL connection**  
Electric inlet at 615mm from the floor  
(Flexible cable 1.5 m in length)

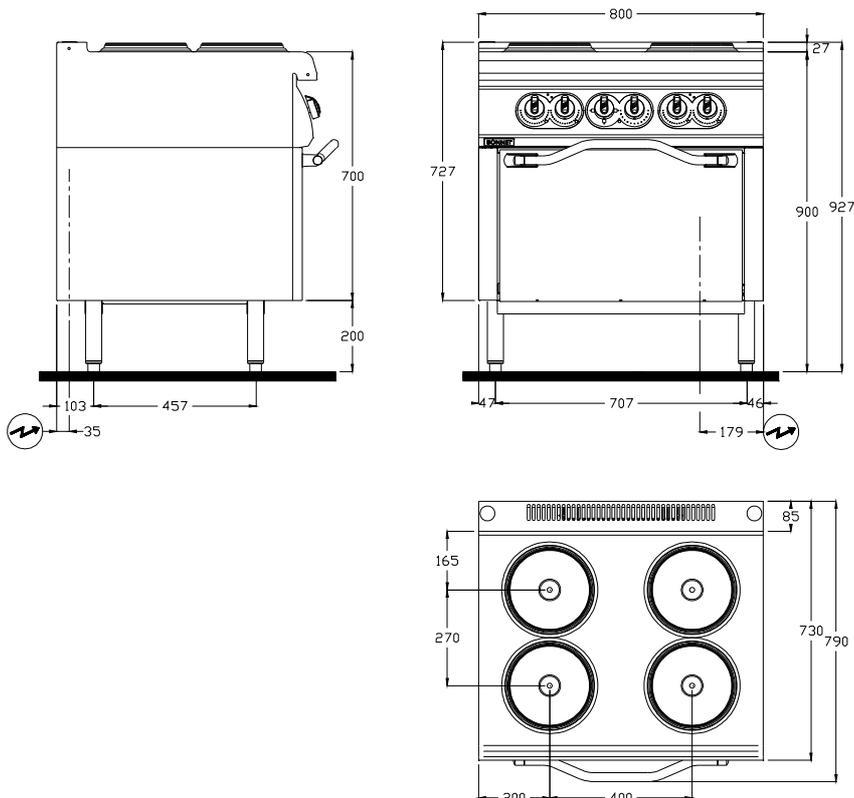

**DIMENSIONS (mm)**

|                   |           |
|-------------------|-----------|
| Width             | 800       |
| Depth x Height    | 790 x 927 |
| Diameter of plate | 220       |

**PACKAGING (mm)**

|                |             |
|----------------|-------------|
| Width          | 940         |
| Depth x Height | 1060 x 1150 |

**WEIGHT (KG)**

125

**COMPOSITION OF TOP**

|                    |   |
|--------------------|---|
| Round plate 2.6 kW | 4 |
|--------------------|---|

**COMPOSITION OF BOTTOM PART**

|                      |   |
|----------------------|---|
| Electric oven 5.1 kW | 1 |
|----------------------|---|

 **ELECTRICITY** (Triphasé 230V+E or 400V+E)

|                    |            |      |
|--------------------|------------|------|
| Power (kW)         | 230V 3a.c. | 15.5 |
|                    | 400V 3a.c. | 15.5 |
| Max. Intensity (A) | 230V 3a.c. | 41.9 |
|                    | 400V 3a.c. | 24.1 |