



BONNET GRANDE CUISINE

Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

OPTIMUM, Gas cooking unit, SOLID TOP on gas oven



EasyCleaningSystem



Start&Cook



AirFlexSystem

SOLID TOP
B107PG8FG



OPTIMUM ASSETS

EasyCleaningSystem : Plate is flush with the worktop.

Start&Cook : Electric spark ignition with pilot and thermocouple.

AirFlexSystem : Convected air onto 3 levels.

GENERAL

- * Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.
- * Appliance delivered with 200mm fixed stand with 4 adjustable feet.

SOLID TOP

- * Cast iron plate average thickness 10mm, size: 550 x 400 with two removable bulls eyes.
- * Stainless insulated combustion chamber forming a recovery container.
- * Heated by circular brass burner ensuring a rapid rise in the temperature of the bulls eyes.
- * Controlled by gas valve.

GAS OVEN

- * The GN2/1 (530 x 650mm) oven cavity has a steel base, removable side runners and is insulated with rockwool.
- * Heavy duty door with integral hinges that are spring counterbalanced, fitted with an insulated handle. Seal is high temperature silicone.
- * Heated by tubular burner.
- * Thermostatic gas valve control from 100 to 270°C, thermocouple safety with pilot and electric ignition as standard.
- * The oven is supplied with a nickelled GN 2/1 grill and a 40mm deep GN 2/1 tray Gastronorm.

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 203-1: European standard relating to the safety of gas appliances.

EN 203-2-9: European standard relating to the safety of gas appliances.

EN 60335-2-36: European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-836).

IP 25 et IK 9: Protection indexes.

XP U 60-010: Hygiene.

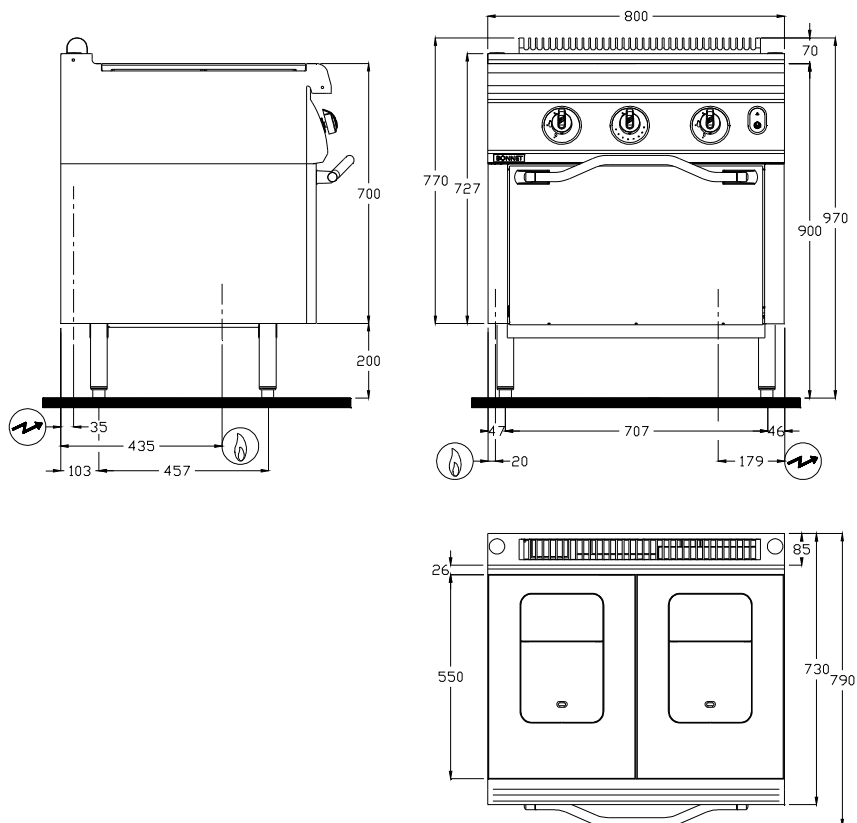


B107PG8FG
GAS connection

Gas inlet at 180mm from the floor

As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

ELECTRICAL connection

Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)

DIMENSIONS (mm)

Width	800
Depth x Height	790 x 970
Solid plate	400 x 550

PACKAGING (mm)

Width	940
Depth x Height	1060 x 1150

WEIGHT (KG)

175

COMPOSITION OF TOP

Solid plate 6.5 kW	2
--------------------	---

COMPOSITION OF THE BOTTOM PART

Gas oven 7.2 kW	1
-----------------	---

GAS

Connection Thread 15/21 mm (1/2")

Power (kW) **20.2**

G31 Propane $37^{+4}/50^{+5}$ mbar (kg/h) 1.57

G30 Butane 50^{+3} mbar (kg/h) 1.59

G20 Natural gas 20^{+2} mbar (m³/h) 2.14

G25 Natural gas $20^{+2}/25^{+3}$ mbar (m³/h) 2.43

Power (kW) **17.4**

G31 Propane $28^{+3}/30^{+3}$ mbar (kg/h) 1.37

ELECTRICITY (Single-phase 230V)

Voltage 230Va.c.

Power (kW) 0.1