

OPTIMUM, Gas cooking unit, SOLID TOP on open cupboard



EasyCleaningSystem



Start&Cook

SOLID TOP B107PG8PG



OPTIMUM ASSETS

Start&Cook : Electric spark ignition with pilot and thermocouple.

EasyCleaningSystem : Plate is flush with the worktop.

GENERAL

- * Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.
- * Appliance delivered with 200mm fixed stand with 4 adjustable feet.

SOLID TOP

- * Cast iron plate average thickness 10mm, size: 550 x 400 with two removable bulls eyes.
- * Stainless insulated combustion chamber forming a recovery container.
- * Heated by circular brass burner ensuring a rapid rise in the temperature of the bulls eyes.
- * Controlled by gas valve.

OPEN CUPBOARD

- * Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips.

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 203-1: European standard relating to the safety of gas appliances.

EN 203-2-9: European standard relating to the safety of gas appliances.

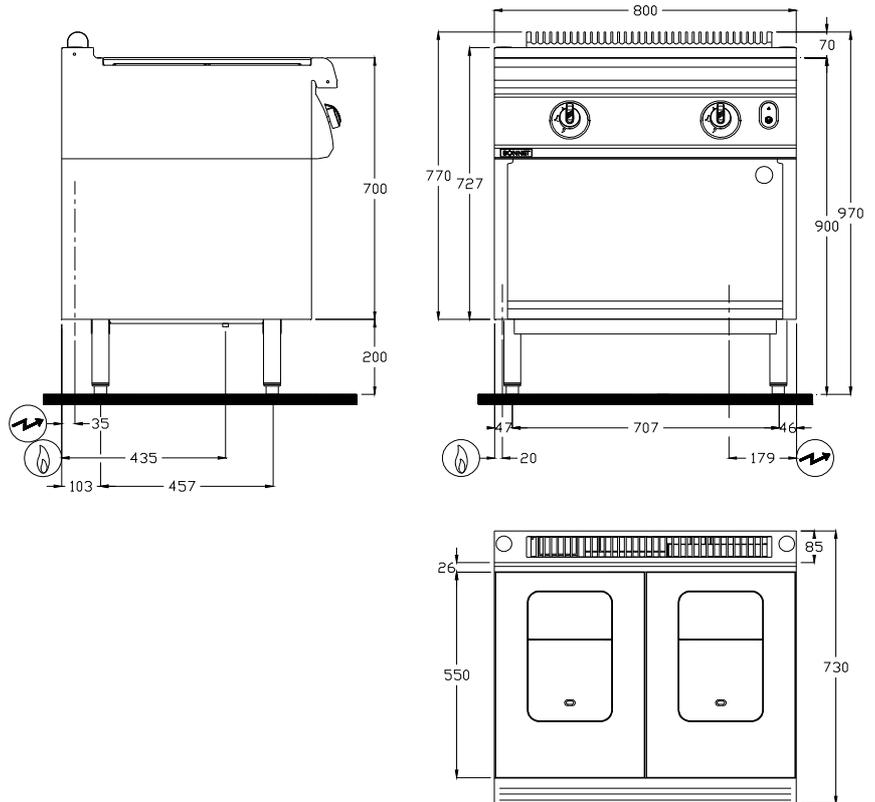
EN 60335-2-36 and EN 60335-2-49: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-836 and C 73-849).

IP 25 et IK 9: Protection indexes.

XP U 60-010: Hygiene.

B107PG8PG

-  **GAS connection**
 Gas inlet at 180mm from the floor
 As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request
-  **ELECTRICAL connection**
 Electric inlet at 615mm from the floor
 (Flexible cable 1.5 m in length)


DIMENSIONS (mm)

Width	800
Depth x Height	730 x 970
Solid plate	400 x 550

PACKAGING (mm)

Width	940
Depth x Height	1060 x 1150

WEIGHT (KG)

105

COMPOSITION OF TOP

Solid plate 6.5 kW	2
--------------------	---

COMPOSITION OF THE BOTTOM PART

Width of open cupboard	800
------------------------	-----

 **GAS**

Connection	Thread 15/21 mm (1/2")	
Power (kW)	13	
G31 Propane	37 ^{±4} /50 ^{±5} mbar (kg/h)	1.01
G30 Butane	50 ^{±3} mbar (kg/h)	1.03
G20 Natural gas	20 ^{±2} mbar (m ³ /h)	1.38
G25 Natural gas	20 ^{±2} /25 ^{±3} mbar (m ³ /h)	1.56
Power (kW)	10.2	
G31 Propane	28 ^{±3} /30 ^{±3} mbar (kg/h)	0.80

 **ELECTRICITY (kW) (Single-phase 230V)**

Power (kW)	230V a.c.	0.1
Accessory cupboard heating kit		2