

## OPTIMUM, Electric cooking top, CHIP DUMP



FlushTop

### INFRARED CHIP DUMP B1O7RFI4DE



### OPTIMUM ASSETS

**FlushTop** : Module can be butt jointed.

### GENERAL

- \* Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- \* All stainless steel construction designed to avoid any infiltration.
- \* Unfailing sturdy equipment for direct wall fixation.
- \* Controls grouped together and recessed protecting them for impact and spillages.

### CHIP DUMP

- \* One piece radiused sloping stainless well, available 400mm wide.
- \* The well has a strainer plate.
- \* Heat is provided by 2 infrared emitters.
- \* Controlled by stop start button and indicator light.
- \* A pull handle built into the control panel drains the well.
- \* Chromed drain spout on the fascia.

### OPTION

- \* One-piece wall or central top.

### ACCESSORIES

- \* See technical data : General features.

### STANDARDS : Compliance with standards

**EN 60335-2-38**: European standards relating to the safety of electric appliances.  
(French standards: Classification index C 73-838).

**IP 25 and IK 9**: Protection indexes.

**XP U 60-010**: Hygiene.





**BONNET GRANDE CUISINE**

**Registered office:**


Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

**B107RFI4DE**

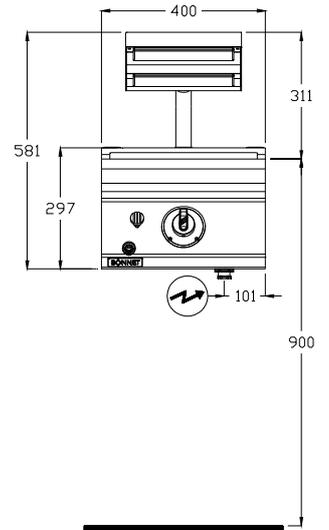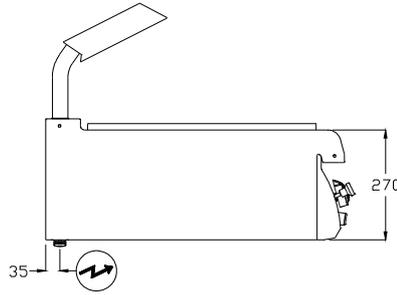

**ELECTRICAL connection**  
 Electric inlet at 615mm from the floor  
 (Flexible cable 1.5 m in length)

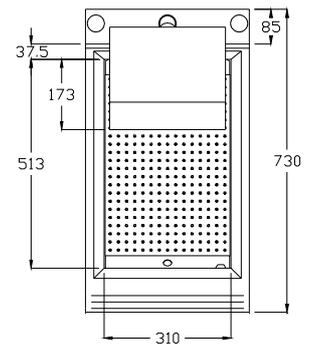

**DIMENSIONS (mm)**

Width	400
Depth	730
Height	581

**PACKAGING (mm)**

Width	540
Depth	1060
Height	750

**CAPACITY (kg)**

Tank	2
------	---

**WEIGHT (KG)**

35

**COMPOSITION OF TOP**

Tank width 310	1
----------------	---

**ELECTRICITY (Single-phase or Three-phase 230V+E or 400V+N+E)**

Power (kW)	230V a.c.	1.3
	230V 3a.c.	1.3
	400V 3Na.c.	1.3
Max. Intensity (A)	230V a.c.	5.7
	230V 3a.c.	5.7
	400V 3Na.c.	5.7

**DRAIN**

On front