



**BONNET GRANDE CUISINE**

**Registered office:**

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

## **OPTIMUM, Gas cooking top, 2 OPEN BUNERS + SOLID TOP**

### **2 OPEN BURNERS + SOLID TOP**

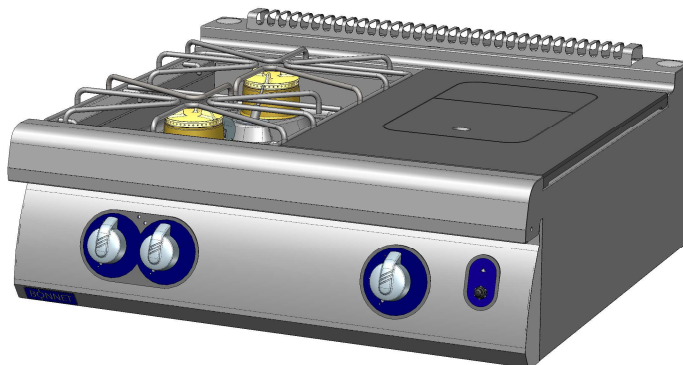
**B207FP8DG**



**EasyCleaningSystem**



**Start&Cook**



### **OPTIMUM ASSETS**

**EasyCleaningSystem** : Operates with a water bath.

**Start&Cook** : Electric spark ignition with pilot and thermocouple for solid top.

### **GENERAL**

- \* Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- \* All stainless steel construction designed to avoid any infiltration.
- \* Unfailing sturdy equipment for direct wall fixation.
- \* Controls grouped together and recessed protecting them for impact and spillages.

### **OPEN BURNERS**

- \* Each module of 2 burners is fitted with:
  - 85mm diameter brass burner pot and head.
  - 1 nickeled steel wire grid.
  - A stainless waterbath to recover any spillages and avoid them burning on.
- \* Controlled by gas valve.
- \* Safety thermocouple as standard.

### **SOLID TOP**

- \* Cast iron plate average thickness 10mm, size: 550 x 400 with two removable bulls eyes.
- \* Stainless insulated combustion chamber forming a recovery container.
- \* Heated by circular brass burner ensuring a rapid rise in the temperature of the bulls eyes.
- \* Controlled by gas valve.

### **OPTION**

- \* Pilot and electric ignition for open burners module with push button on the fascia.

### **ACCESSORIES**

- \* See technical data : General features.

### **STANDARDS : Compliance with standards**

**EN 203-1**: European standard relating to the safety of gas appliances.

**EN 203-2-1 and EN 203-2-9**: European standard relating to the safety of gas appliances.

**EN 60335-2-36**: European standards relating to the safety of electric appliances.

(French standards: Classification index C 73-836).

**IP 25 et IK 9**: Protection indexes.

**XP U 60-010**: Hygiene.

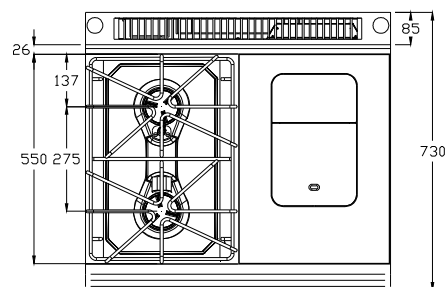
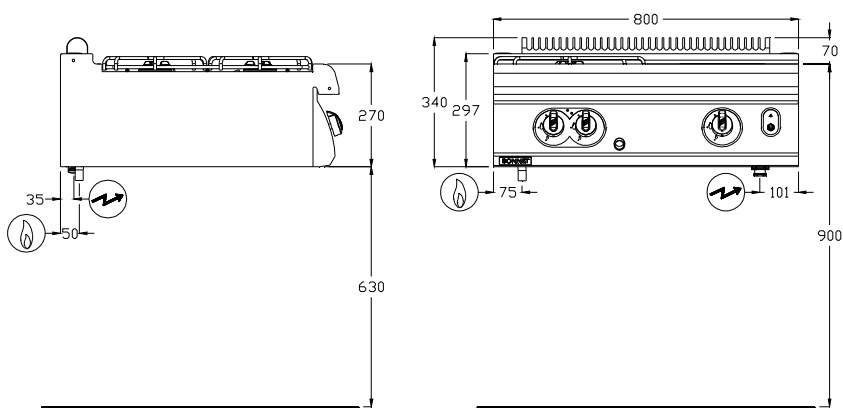


**B207FP8DG**
**GAS connection**

Gas inlet at 590mm from the floor

As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

**ELECTRICAL connection**

Electric inlet at 615mm from the floor  
(Flexible cable 1.5 m in length)

**DIMENSIONS (mm)**

Width	800
Depth x Height	730 x 340
Open burner grid	400 x 550
Solid plate	400 x 550

**PACKAGING (mm)**

Width	940
Depth x Height	1060 x 700

**WEIGHT (KG)**

80

**COMPOSITION OF TOP**

Front burner 4.5 kW	1
Rear burner 4.5 kW	1
Solid plate 6.5 kW	1

**GAS**

Connection Thread 15/21 mm (1/2")

**Power (kW)**
**15.5**

G31 Propane  $37^{+4}/50^{+5}$  mbar (kg/h) 1.20

G30 Butane  $50^{+5}$  mbar (kg/h) 1.22

G20 Natural gas  $20^{+2}$  mbar (m<sup>3</sup>/h) 1.64

G25 Natural gas  $20^{+2}$  mbar (m<sup>3</sup>/h) 1.80

G25 Natural gas  $25^{+3}$  mbar (m<sup>3</sup>/h) 1.80

**Power (kW)**
**13.1**

G30 Butane  $28^{+3}/30^{+3}$  mbar (kg/h) 1.03

**ELECTRICITY (kW) (Single-phase 230V)**

Power (kW) 230V a.c. 0.1

Option Electric ignition 0.1