



BONNET GRANDE CUISINE

Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

OPTIMUM, Gas cooking top, 2 OPEN BUNERS

2 OPEN BUNERS

B207FV4DG



EasyCleaningSystem



OPTIMUM ASSETS

EasyCleaningSystem : Operates with a water bath.

GENERAL

- * Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.

OPEN BURNERS

- * Each module of 2 burners is fitted with:
 - 85mm diameter brass burner pot and head.
 - 1 nickeled steel wire grid.
 - A stainless waterbath to recover any spillages and avoid them burning on.
- * Controlled by gas valve.
- * Safety thermocouple as standard.

OPTION

- * Pilot and electric ignition with push button on the fascia.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 203-1: European standard relating to the safety of gas appliances.


EN 203-2-1: European standard relating to the safety of gas appliances.

EN 60335-2-36: European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-836).

IP 25 et IK 9: Protection indexes.

XP U 60-010: Hygiene.

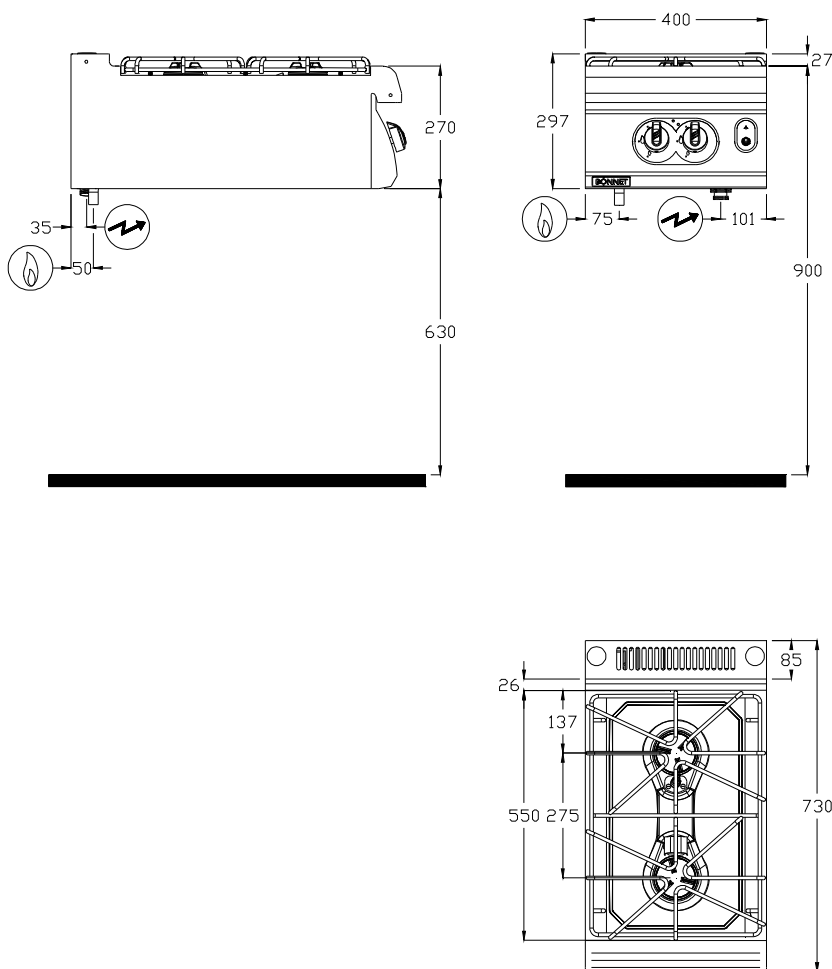

B207FV4DG

GAS connection

Gas inlet at 590mm from the floor

As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

ELECTRICAL connection

Electric inlet at 615mm from the floor

(Flexible cable 1.5 m in length)

DIMENSIONS (mm)

Width	400
Depth x Height	730 x 297
Open burner grid	400 x 550

PACKAGING (mm)

Width	540
Depth x Height	1060 x 700

WEIGHT (KG)

25

COMPOSITION OF TOP

Front burner 4.5 kW	1
Rear burner 4.5 kW	1

GAS

Connection Thread 15/21 mm (1/2")

Power (kW) **9**

G31 Propane $37^{+4}/50^{+5}$ mbar (kg/h) 0.7

G30 Butane 50^{+5} mbar (kg/h) 0.71

G20 Natural gas 20^{+2} mbar (m³/h) 0.95

G25 Natural gas 20^{+2} mbar (m³/h) 1.1

G25 Natural gas 25^{+3} mbar (m³/h) 1.1

Power (kW) **8**

G30 Butane $28^{+3}/30^{+3}$ mbar (kg/h) 0.63

ELECTRICITY (If option electric ignition)

Voltage Single-phase 230Va.c.

Power (kW) 0.1