



**BONNET GRANDE CUISINE**

**Registered office:**

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex


## **OPTIMUM, Gas cooking top, 4 OPEN BUNERS**

### **4 OPEN BUNERS**

**B207FV8DG**



EasyCleaningSystem

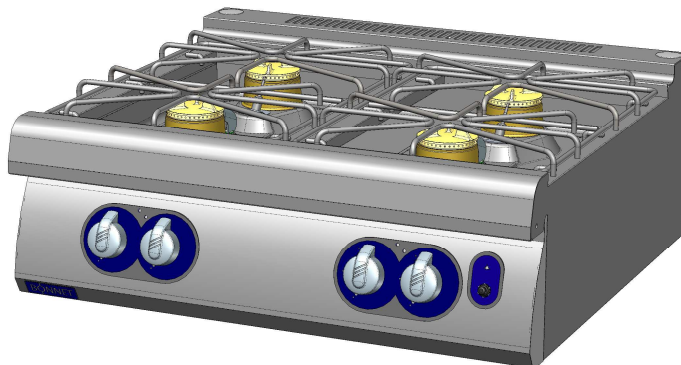

### **OPTIMUM ASSETS**

**EasyCleaningSystem** : Operates with a water bath.

### **GENERAL**

- \* Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- \* All stainless steel construction designed to avoid any infiltration.
- \* Unfailing sturdy equipment for direct wall fixation.
- \* Controls grouped together and recessed protecting them for impact and spillages.

### **OPEN BURNERS**

- \* Each module of 4 burners is fitted with:
  - 85mm diameter brass burner pot and head.
  - 1 nicked steel wire grid.
  - A stainless waterbath to recover any spillages and avoid them burning on.
- \* Controlled by gas valve.
- \* Safety thermocouple as standard.

### **OPTION**

- \* Pilot and electric ignition with push button on the fascia.

### **ACCESSORIES**

- \* See technical data : General features.

### **STANDARDS : Compliance with standards**

**EN 203-1**: European standard relating to the safety of gas appliances.

**EN 203-2-1**: European standard relating to the safety of gas appliances.


**EN 60335-2-36**: European standards relating to the safety of electric appliances.  
(French standards: Classification index C 73-836).

**IP 25 et IK 9**: Protection indexes.

**XP U 60-010**: Hygiene.



### B207FV8DG

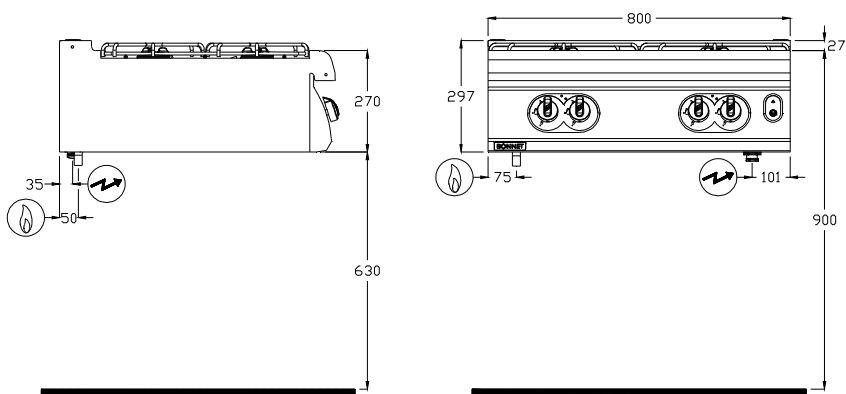

#### **GAS connection**


Gas inlet at 590mm from the floor

As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

#### **ELECTRICAL connection**

Electric inlet at 615mm from the floor

(Flexible cable 1.5 m in length)

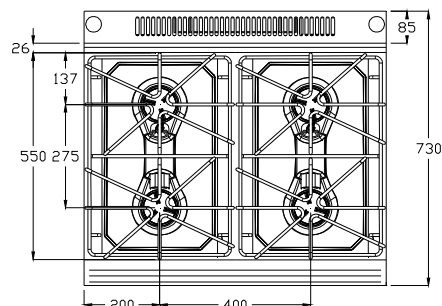

#### **DIMENSIONS (mm)**

Width	800
Depth x Height	730 x 297
Open burner grid	400 x 550

#### **PACKAGING (mm)**

Width	940
Depth x Height	1060 x 700

#### **WEIGHT (KG)**

40

#### **COMPOSITION OF TOP**

Front burner 4.5 kW	2
Rear burner 4.5 kW	2

#### **GAS**

Connection Thread 15/21 mm (1/2")

**Power (kW)** **18**

G31 Propane  $37^{\pm 4}/50^{\pm 5}$  mbar (kg/h) 1.40

G30 Butane  $50^{\pm 5}$  mbar (kg/h) 1.42

G20 Natural gas  $20^{\pm 2}$  mbar (m<sup>3</sup>/h) 1.90

G25 Natural gas  $20^{\pm 2}$  mbar (m<sup>3</sup>/h) 2.2

G25 Natural gas  $25^{\pm 3}$  mbar (m<sup>3</sup>/h) 2.2

**Power (kW)** **16**

G30 Butane  $28^{\pm 3}/30^{\pm 3}$  mbar (kg/h) 1.26

#### **ELECTRICITY** (If option electric ignition)

Voltage Single-phase 230Va.c.

Power (kW) 0.1