



BONNET GRANDE CUISINE

Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

OPTIMUM, Gas cooking unit, 4 OPEN BURNERS on open cupboard



EasyCleaningSystem

4 OPEN BURNERS B207FV8PG



OPTIMUM ASSETS

EasyCleaningSystem : Operates with a water bath.

GENERAL

- * Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.
- * Appliance delivered with 200mm fixed stand with 4 adjustable feet.

OPEN BURNERS

- * Each module of 4 burners is fitted with:
 - 85mm diameter brass burner pot and head.
 - 1 nickeled steel wire grid.
 - A stainless waterbath to recover any spillages and avoid them burning on.
- * Controlled by gas valve.
- * Safety thermocouple as standard.

OPEN CUPBOARD

- * Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips.

OPTION

- * Pilot and electric ignition with push button on the fascia.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 203-1: European standard relating to the safety of gas appliances.

EN 203-2-1: European standard relating to the safety of gas appliances.

EN 60335-2-36 and EN 60335-2-49: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-836 and C 73-849).


IP 25 et IK 9: Protection indexes.

XP U 60-010: Hygiene.



B207FV8PG

- GAS connection**
Gas inlet at 180mm from the floor
As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request
- ELECTRICAL connection**
Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)

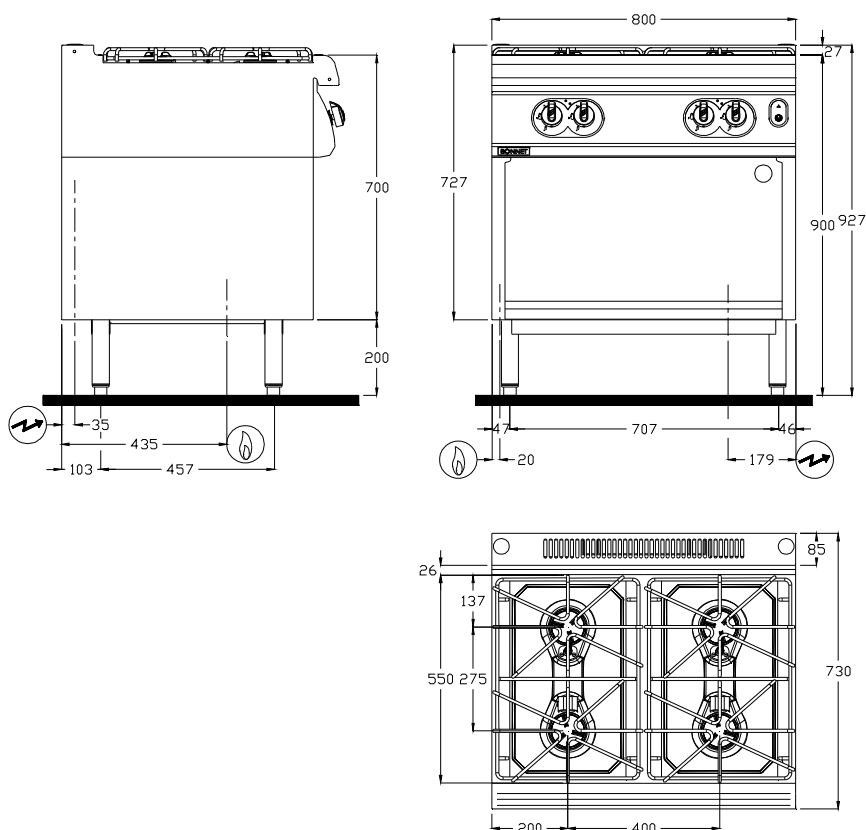

DIMENSIONS (mm)

Width	800
Depth x Height	730 x 927
Open burner grid	400 x 550

PACKAGING (mm)

Width	940
Depth x Height	1060 x 1150

WEIGHT (KG)

95

COMPOSITION OF TOP

Front burner 4.5 kW	2
Rear burner 4.5 kW	2

COMPOSITION OF THE BOTTOM PART

Width of open cupboard	800
------------------------	-----

GAS

Connection Thread 15/21 mm (1/2")

Puissance (kW)

18

G31 Propane	$37^{+4}/50^{+5}$ mbar (kg/h)	1.40
G30 Butane	50^{+5} mbar (kg/h)	1.42
G20 Natural gas	20^{+2} mbar (m ³ /h)	1.90
G25 Natural gas	20^{+2} mbar (m ³ /h)	2.21
G25 Natural gas	25^{+3} mbar (m ³ /h)	2.21

Puissance (kW)

16

G30 Butane	$28^{+3}/30^{+3}$ mbar (kg/h)	1.26
------------	-------------------------------	------

ELECTRICITY (kW) (Single-phase 230V)

Option Electric ignition	0.1
Accessory electrical ignition	2