

OPTIMUM, Gas cooking top, SOLID TOP + 2 OPEN BURNERS**SOLID TOP + 2 OPEN BURNERS**

B207PF8DG



EasyCleaningSystem



Start&Cook

**OPTIMUM ASSETS****EasyCleaningSystem** : Operates with a water bath.**Start&Cook** : Electric spark ignition with pilot and thermocouple for solid top.**GENERAL**

- * Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.

SOLID TOP

- * Cast iron plate average thickness 10mm, size: 550 x 400 with two removable bulls eyes.
- * Stainless insulated combustion chamber forming a recovery container.
- * Heated by circular brass burner ensuring a rapid rise in the temperature of the bulls eyes.
- * Controlled by gas valve.

OPEN BURNERS

- * Each module of 2 burners is fitted with:
 - 85mm diameter brass burner pot and head.
 - 1 nickered steel wire grid.
 - A stainless waterbath to recover any spillages and avoid them burning on.
- * Controlled by gas valve.
- * Safety thermocouple as standard.

OPTION

- * Pilot and electric ignition for open burners module with push button on the fascia.

ACCESSORIES

- * See technical data : General features.


STANDARDS : Compliance with standards**EN 203-1**: European standard relating to the safety of gas appliances.**EN 203-2-1 and EN 203-2-9**: European standard relating to the safety of gas appliances.**EN 60335-2-36**: European standards relating to the safety of electric appliances.
(French standards: Classification index C 73-836).**IP 25 et IK 9**: Protection indexes.**XP U 60-010**: Hygiene.




BONNET GRANDE CUISINE

Registered office:
Rue des Frères Lumière - Z.I Mitry Compans
F-77292 MITRY MORY Cedex

B207PF8DG

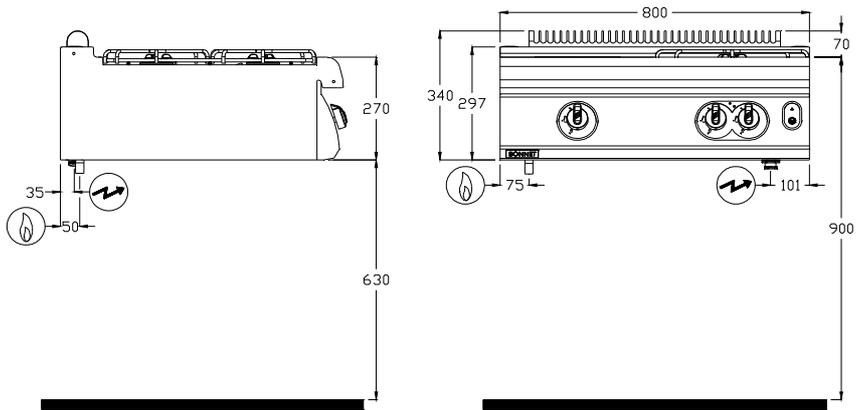

- GAS connection**
Gas inlet at 590mm from the floor
As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request
- ELECTRICAL connection**
Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)

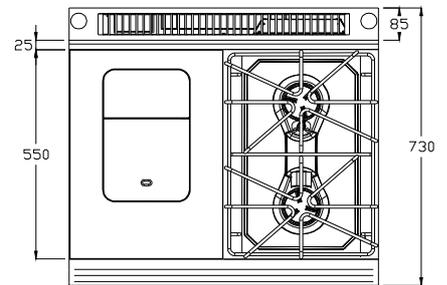

DIMENSIONS (mm)

Width	800
Depth x Height	730 x 340
Solid plate	400 x 550
Open burner grid	400 x 550

PACKAGING (mm)

Width	940
Depth x Height	1060 x 700

WEIGHT (KG)

80

COMPOSITION OF TOP

Solid top 6.5 kW	1
Front burner 4.5 kW	1
Rear burner 4.5 kW	1

GAS

Connection	Thread 15/21 mm (1/2")	
Power (kW)	15.5	
G31 Propane	37 ^{±4} /50 ^{±5} mbar (kg/h)	1.20
G30 Butane	50 ^{±5} mbar (kg/h)	1.22
G20 Natural gas	20 ^{±2} mbar (m ³ /h)	1.64
G25 Natural gas	20 ^{±2} mbar (m ³ /h)	1.80
G25 Natural gas	25 ^{±3} mbar (m ³ /h)	1.80
Power (kW)	13.1	
G30 Butane	28 ^{±3} /30 ^{±3} mbar (kg/h)	1.03

ELECTRICITY (kW) (Single-phase 230V)

Power (kW)	230V a.c.	0.1
Option Electric ignition		0.1