



BONNET GRANDE CUISINE

Registered office:

Rue des Frères Lumière - Z.I Mitry Compans

F-77292 MITRY MORY Cedex

OPTIMUM, Gas cooking unit, SOLID TOP + 2 OPEN BURNERS on open cupboard



EasyCleaningSystem



Start&Cook

SOLID TOP + 2 OPEN BURNERS B207PF8PG



OPTIMUM ASSETS

EasyCleaningSystem : Operates with a water bath.

Start&Cook : Electric spark ignition with pilot and thermocouple for solid plate.

GENERAL

- * Upper structure totally stainless (top 2mm thick and inset side faces in 1.5mm laser welded)
- * All stainless steel construction designed to avoid any infiltration.
- * Unfailing sturdy equipment for direct wall fixation.
- * Controls grouped together and recessed protecting them for impact and spillages.
- * Appliance delivered with 200mm fixed stand with 4 adjustable feet.

SOLID TOP

- * Cast iron plate average thickness 10mm, size: 550 x 400 with two removable bulls eyes.
- * Stainless insulated combustion chamber forming a recovery container.
- * Heated by circular brass burner ensuring a rapid rise in the temperature of the bulls eyes.
- * Controlled by gas valve.

OPEN BURNERS

- * Each module of 2 burners is fitted with:
 - 85mm diameter brass burner pot and head.
 - 1 nicked steel wire grid.
 - A stainless waterbath to recover any spillages and avoid them burning on.
- * Controlled by gas valve.
- * Safety thermocouple as standard.

OPEN CUPBOARD

- * Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips.

OPTION

- * Pilot and electric ignition for open burners module with push button on the fascia.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

EN 203-1: European standard relating to the safety of gas appliances.

EN 203-2-1 and EN 203-2-9: European standard relating to the safety of gas appliances.

EN 60335-2-36 and EN 60335-2-49: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-836 and C 73-849).

IP 25 et IK 9: Protection indexes.

XP U 60-010: Hygiene.

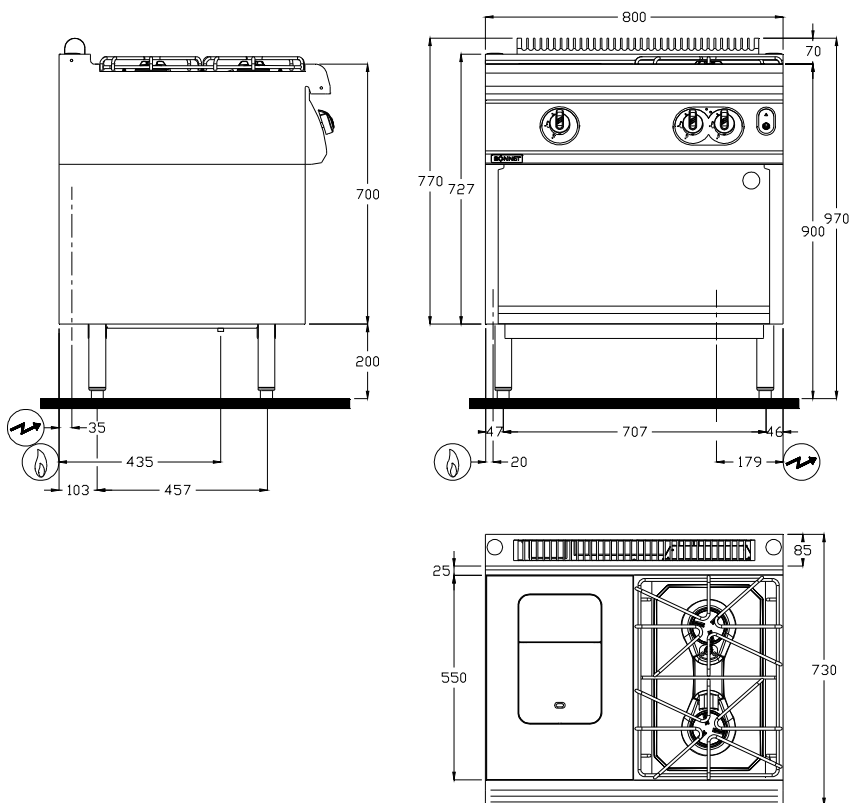


B2O7PF8PG
GAS connection

Gas inlet at 180mm from the floor
As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

ELECTRICAL connection

Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)


DIMENSIONS (mm)

Width	800
Depth x Height	730 x 970
Solid plate	400 x 550
Open burner grid	400 x 550

PACKAGING (mm)

Width	940
Depth x Height	1060 x 1150

WEIGHT (KG)

100

COMPOSITION OF TOP

Solid top 6.5 kW	1
Front burner 4.5 kW	1
Rear burner 4.5 kW	1

COMPOSITION OF THE BOTTOM PART

Width of open cupboard	800
------------------------	-----

GAS

Connection Thread 15/21 mm (1/2")

Power (kW)
15.5

G31 Propane	$37^{+4}/50^{+5}$ mbar (kg/h)	1.20
G30 Butane	50^{+5} mbar (kg/h)	1.22
G20 Natural gas	20^{+2} mbar (m ³ /h)	1.64
G25 Natural gas	20^{+2} mbar (m ³ /h)	1.80
G25 Natural gas	25^{+3} mbar (m ³ /h)	1.80

Power (kW)
13.1

G30 Butane	$28^{+3}/30^{+3}$ mbar (kg/h)	1.03
------------	-------------------------------	------

ELECTRICITY (kW) (Single-phase 230V)

Power (kW)	230V a.c.	0.1
Option Electric ignition		0.1
Accessory cupboard heating kit		2