

## ADVANCIA, Electric BRATT PAN 45 dm<sup>2</sup> / 80 litres (manual tilt)

### BRATT PAN 45 dm<sup>2</sup> / 80 litres B3A9SA45MBE



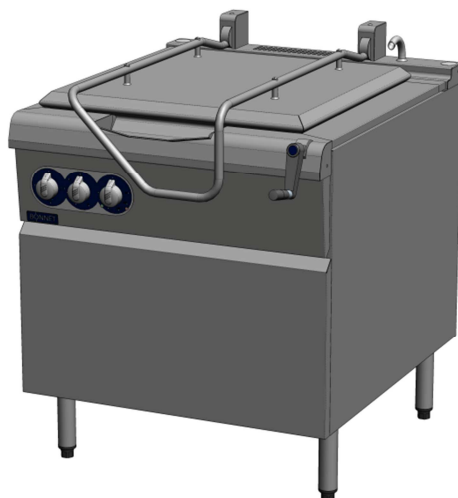
3 mm Top



FlushTop



CoreControl



### ADVANCIA ASSETS

**3mmTop:** One piece 3mm thick stainless steel structure.

**FlushTop:** Module can be butt jointed.

**CoreControl:** Power adapts with well base regulation.

### GENERAL

- \* All stainless steel construction designed to avoid any infiltration.
- \* Extremely robust it can be bolted directly to a wall.
- \* Controls grouped together and recessed protecting them for impact and spillages.
- \* Appliance delivered with 200mm fixed stand with 4 adjustable feet.

### BRATT PAN

- \* This appliance consists of a tank designed to tilt through the width of the element.
- \* Its base, with a useful surface of 30 dm<sup>2</sup> is made of very thick stainless steel plate so as to ensure a uniform surface temperature.
- \* The large format spout allows for quick and clean draining (no dripping on the front panel) guaranteeing a constant impact point over the floor gully.
- \* The hot and cold water supply is via a solenoid valve controlled by a 4-position switch to a stainless steel spout.
- \* The cover is counter-balanced by a system built into the collector with adjustment for tension and opening angle.
- \* Heating is regulated by a thermostat (for back temperature) + an energy regulator simmerstat (for the power) with heating indicator. A safety device switches off heating when tilting the tank.
- \* Armoured heating elements under the surface of the base ensure uniform heating.

### MANUAL TILT

- \* The smooth and progressive tilting of the well is achieved using a crank with a folding handle built into the well profile.
- \* This patented device ensures complete safety of operation. (The handle moves with the well and remains at an ergonomic height).

### OPTION

- \* Double skinned lid.

### ACCESSORIES

- \* See technical data : General features.

### STANDARDS : Complies with

**EN 60335-2-39:** European standards relating to the safety of electric appliances.  
(French standards: Classification index C 73-839).

**IP 25 and IK 9:** Protection indexes.

**XP U 60-010:** Hygiene.

**B3A9SA45MBE**

**ELECTRICAL connection**

Electric inlet at 190mm from the floor  
(Flexible cable 1.5 m in length)


**POTABLE HOT WATER**

Water inlet at 200mm from the floor


**POTABLE COLD WATER**

Water inlet at 200mm from the floor

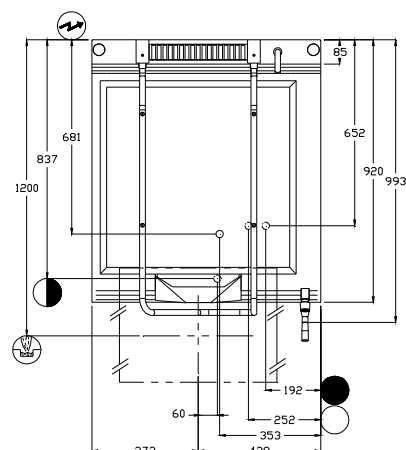
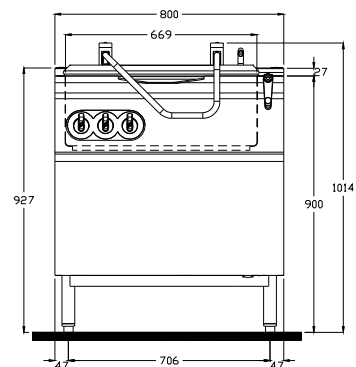
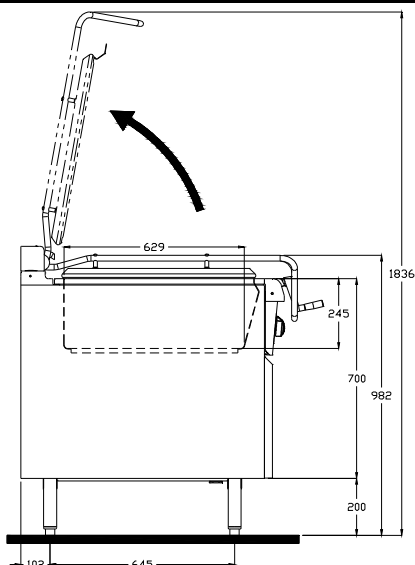


**GULLEY**

Minimum dimensions 550 x 800 mm


**DRAIN water supply pipe purging**

Drain outlet at 200mm from the floor

The operation of the tilt handle requires a space of 170mm to the right hand side of the unit. This amount of clearance is required for correct ergonomic operation. Consequently a **manual tilt** bratt pan should be located at least 170mm from a wall.


**DIMENSIONS (mm)**

|                              |                    |
|------------------------------|--------------------|
| Width                        | 800                |
| Depth x Height               | 1017 x 1014        |
| Tank (Depth x Width x Depth) | 245 x 669 x 629    |
| Useful surface               | 42 dm <sup>2</sup> |
| Nominal capacity             | 80 litres          |

**PACKAGING (mm)**

|                |             |
|----------------|-------------|
| Width          | 940         |
| Depth x Height | 1120 x 1150 |

**WEIGHT (KG)**

160


**ELECTRICITY** (Three-phase 230V+E or 400V+N+E)

|                    |             |      |
|--------------------|-------------|------|
| Power (kW)         | 230V 3a.c.  | 13.5 |
|                    | 400V 3Na.c. | 13.5 |
| Max. Intensity (A) | 230V 3a.c.  | 33.9 |
|                    | 400V 3Na.c. | 19.6 |


**POTABLE COLD WATER**

|                      |                               |
|----------------------|-------------------------------|
| Pressure (Min / Max) | 150/600 kPa (1.5 bar / 6 bar) |
| Max temperature      | 30°C                          |
| Nature               | Filtered to 50 microns        |
| Connection           | 20/27 Ø (3/4")                |


**POTABLE HOT WATER**

|                      |                               |
|----------------------|-------------------------------|
| Pressure (Min / Max) | 150/600 kPa (1.5 bar / 6 bar) |
| Max temperature      | 60°C                          |
| Nature               | Filtered to 50 microns        |
| Connection           | 20/27 Ø (3/4")                |