

## ADVANCIA, Gas BRATT PAN 80 dm<sup>2</sup> / 150 liters (electric tilt)

### BRATT PAN 80 dm<sup>2</sup> / 150 liters B3A9SA80EBG



3 mm Top




FlushTop



Start&Cook



CoreControl

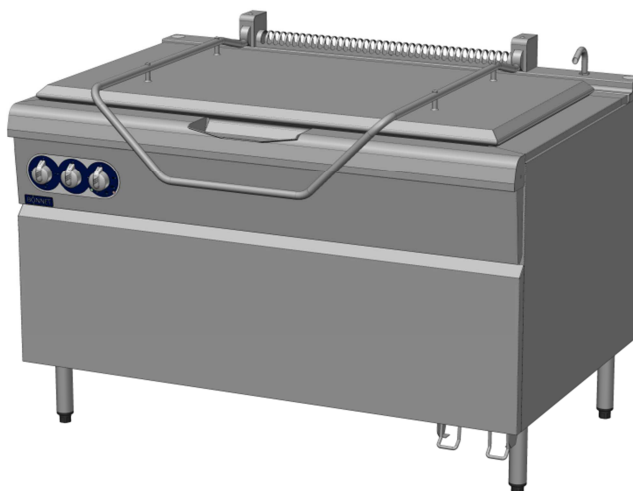

### ADVANCIA ASSETS

**3mmTop** : One piece 3mm thick stainless steel structure.

**FlushTop** : Module can be butt jointed.

**Start&Cook** : Electric spark ignition with pilot and thermocouple.

### GENERAL

- \* All stainless steel construction designed to avoid any infiltration.
- \* Unfailing sturdy equipment for direct wall fixation.
- \* Controls grouped together and recessed protecting them for impact and spillages.
- \* Appliance delivered with 200mm fixed stand with 4 adjustable feet.

### BRATT PAN

- \* This appliance has a full width tilting tank.
- \* Its bottom with a useful surface of 80 dm<sup>2</sup> is made of with a 15mm thick bimetal bottom (12 mm mild Steel + 3mm Stainless steel) so as to ensure a regular heating temperature.
- \* The large format pouring funnel allows for quick and clean drainage (no dripping on the front panel) guaranteeing a constant impact point in the gutter.
- \* The hot water / cold water supply through a solenoid valve is controlled by a 4-position switch and a chrome spout.
- \* The cover is balanced by a system built in the collector for adjustment of the tension and angular thrust.
- \* Two foot controls (raise pedal, lower pedal) allow the well to be raised smoothly and stopped in any position by its electric ram. The tilt is limited by high and low safety systems.
- \* Heating is regulated by a thermostat (for back temperature) + an energy regulator simmerstat (for the power) to drive a gas solenoid.
- \* Temperature distribution is ensured by a micro perforated fixed burner with 16 flame ranges.

### OPTION

- \* Double skinned lid.

### ACCESSORIES

- \* See technical data : General features.

### STANDARDS : Compliance with standards

**EN 203-1**: European standard relating to the safety of gas appliances.

**EN 203-2-8**: European standard relating to the safety of gas appliances.

**EN 60335-2-39**: European standards relating to the safety of electric appliances.  
(French standards: Classification index C 73-839).

**IP 25 et IK 9**: Protection indexes.

**XP U 60-010**: Hygiene.

**B3A9SA80EBG**
**GAS connection**

Gas inlet at 180mm from the floor  
As standard, the appliances are supplied for G 20/20 mbar (and G 25/25 mbar) or another gas on request

**ELECTRICAL connection**

Electric inlet at 190mm from the floor  
(Flexible cable 1.5 m in length)

**POTABLE HOT WATER**


Water inlet at 200mm from the floor

**POTABLE COLD WATER**

Water inlet at 200mm from the floor

**GUTTER**

Minimum dimensions 550 x 800 mm

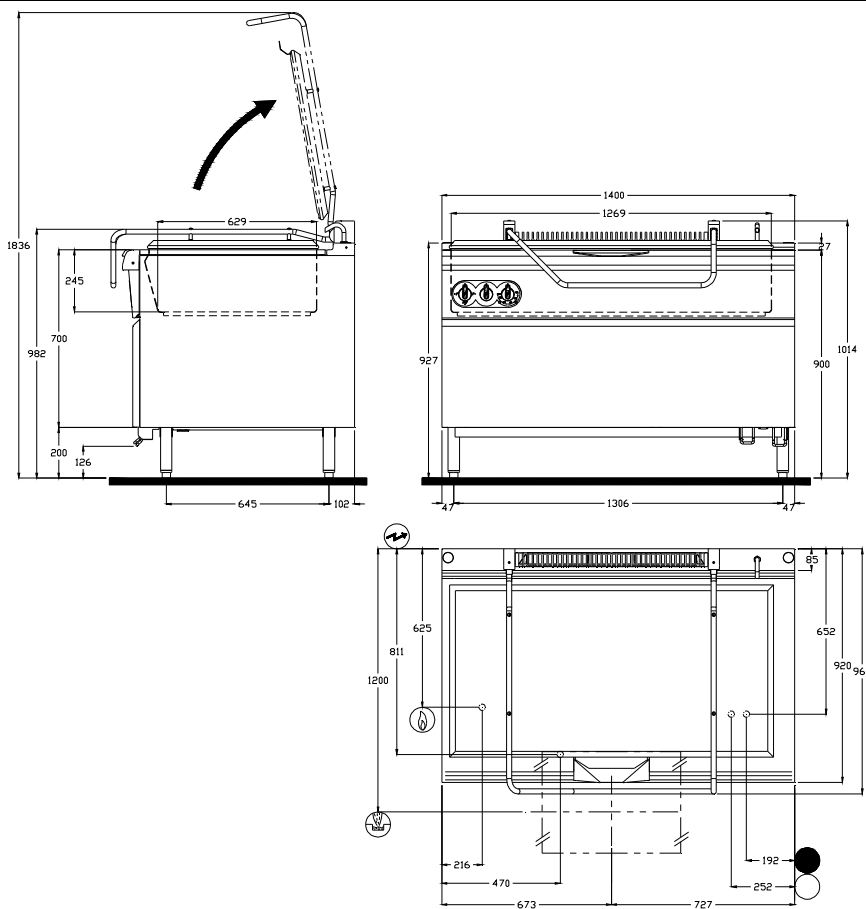
**DIMENSIONS (mm)**

Width	1400
Depth x Height	1017 x 1014
Tank (Depth x Width x Depth)	245 x 1269 x 629
Useful surface	80 dm <sup>2</sup>
Nominal capacity	150 liter

**PACKAGING (mm)**

Width x Depth x Height	1540 x 1130 x 1150
------------------------	--------------------

**WEIGHT (KG) (gross / net)**

260 / 235

**GAS**

Connection : Thread 15/21 mm (1/2")

**Power (kW)**
**33**

G31 Propane 37<sup>±4</sup>/50<sup>±5</sup> mbar (kg/h)

2.57

G30 Butane 28<sup>±3</sup>/50<sup>±5</sup> mbar (kg/h)

2.60

G20 Natural Gas 20<sup>±2</sup> mbar (m<sup>3</sup>/h)

3.49

G25 Natural Gas 20<sup>±2</sup>/25<sup>±3</sup> mbar (m<sup>3</sup>/h)

3.97

**ELECTRICITY (kW)**

Voltage

Single-phase 230 V

Power

0.30

**POTABLE COLD WATER**

Pressure (Min / Max)

150/600 kPa (1.5 bars / 6 bars)

Max temperature

30°C

Nature

Filtered to 50 microns

Connection

Ø 20/27 (3/4")

**POTABLE HOT WATER**

Pressure (Min / Max)

150/600 kPa (1.5 bars / 6 bars)

Max temperature

60°C

Nature

Filtered to 50 microns

Connection

Ø 20/27 (3/4")