


Fast Cooling and Freezing 72/28 and 88/44 models - 13 levels GN1/1

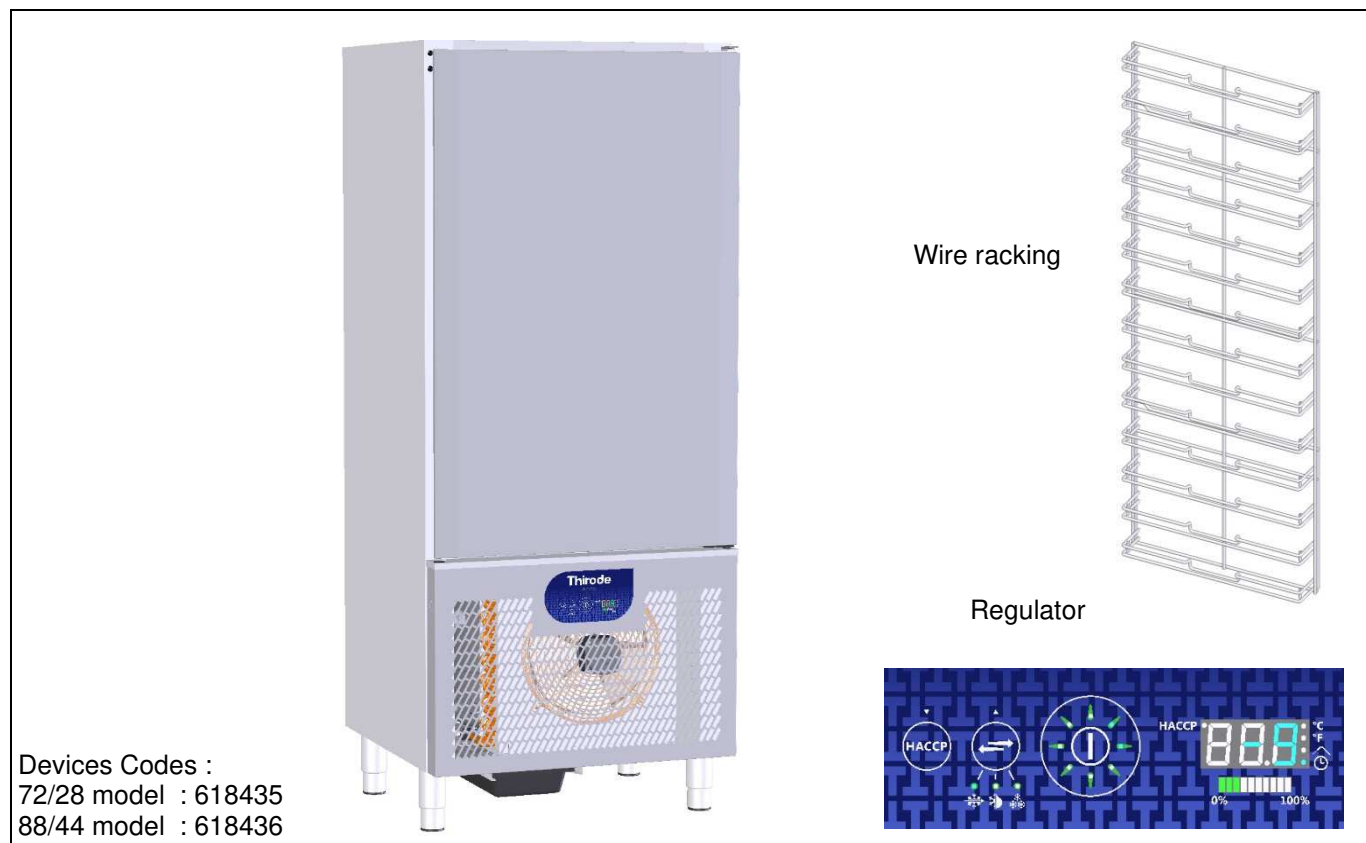

Devices Codes :
72/28 model : 618435
88/44 model : 618436

- * Mixed blast chiller or blast freezing, designed for catering, allowing to go from +65 to + 10 ° C in less than 90 minutes or from +65 to -18 ° C in less than 4h30, in accordance with the AC agreement D 40 003.
- * Hermetic compressor unit with air condensor.
- * Capacities :
72/28 model : 72 kg cooling et 28 kg freezing
88/44 model : 88 kg cooling et 44 kg freezing
- * 13 GN1/1 and 600x400 levels inner racking, step 75mm, 530mm entry, constituted of 2 S/S wire racking. The blast chiller is delivered without shelf.
- * Electronic regulator with 3 capacitives buttons to carry out cooling cycle, freezing cycle, conservation cycle and defrost cycle :
 - 1 bouton : launch and stop cycle by default
 - 1 bouton : additional fontion choice (anti-freezing, defrost or freezing)
 - 1 HACCP bouton : allowing to have the elapsed cycle time and an estimate of the remaining cycle time
- * The blastchiller is delivered wih core probe, allowing to manage cycles
- * Standard hinge door at right, reversing on demand (option or/and on site).
- * 304 s/s finish inside & out (note: rear clad and exterior base finished in galvanised steel)
- * The device is equipped with a drawer for collecting defrost water.


OPTIONS



- | | |
|--|--|
| <ul style="list-style-type: none"> - GN1/1 S/S shelves - 600x400 S/S shelves - Réévaporation électrique des eaux de dégivrage, nettoable - Hinge door at left - 17 levels wire racking, step 60mm - Castors with breaks - R452A fluid | <ul style="list-style-type: none"> - Remote : consult us - Regulation on the top - Top, 20mm thickness - Top with splashback, 20mm thickness - All S/S - HACCP recorder (USB plug) |
|--|--|

BLAST CHILLER

72/28 and 88/44 models

Technical characteristics

Dimensions (mm)		Height	Width	Depth
	External	1825	755	690
	Inner	1075	635	413
Weight (Kg)		72/28		88/44
	Gross	210		220
Electricity				
	Voltage	1~230V		400V 3N~
	Fréquency	50 Hz		
	Protection	AM 10		
	Maximun power	2500 W		4300 W
Refrigerated system				
	Refrigerant capacity. (W)	4730 at -10/+32°C		10263 at -10/+32°C
	Compressor	Hermetic		
	Evaporator	Air ventilated		
	Fluid	R452A		
	Fluid charge	(see nameplate)		
	Condenser	Air		
	Acoustic pressure (dbA)	60		66
	Heat emission (W / cycle)	10250		19426
	Capacities			
	Cooling loading/cycle	72 kg		88 kg
	Freezer loading/cycle	28 kg (**)		44 kg (**)
	Gross capacity (L)	280 L		
	Wire shelves	GN1/1 (not included)		
	Max. level number	13 levels, step 75mm		
Temperatures				
	Max. ambient	+43°C		
	Temperature range	+63°C at +10°C in 90 min. +63°C at -18°C in 4H50		
Construction				
	Type	Monoshell		
	Inner/extrenal housing	S/S 304		
	Insulation	60mm th. polyurethane		
Standards				
		Hygiene : EN 17 032 Européen EN 1672-2		

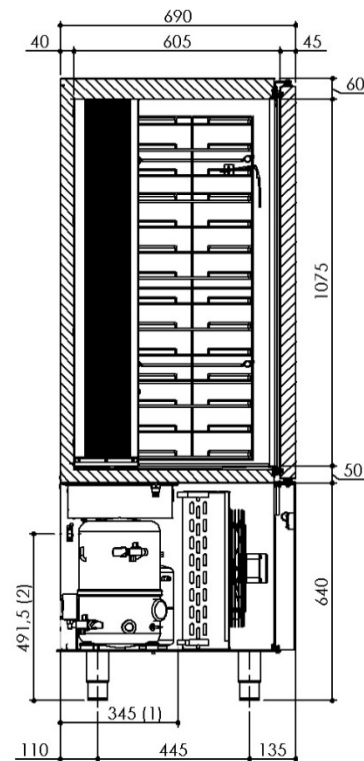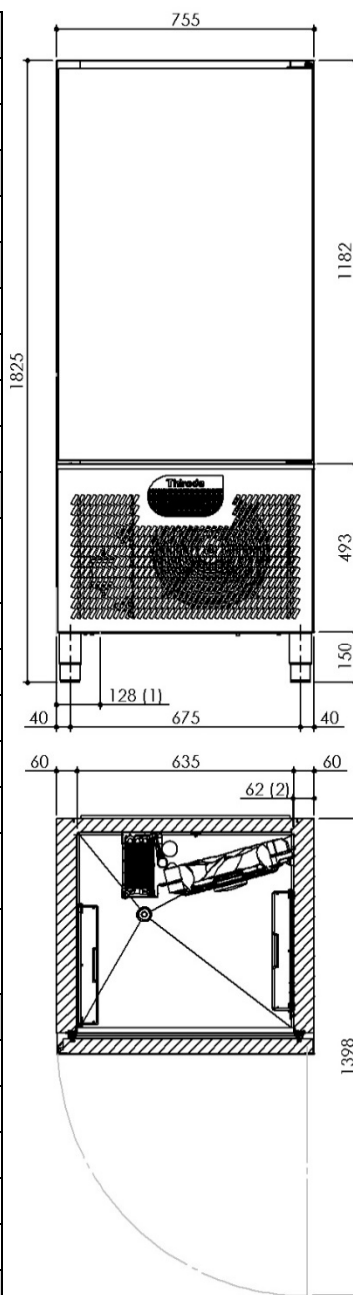

(1) : Defrost water drain (ø20)

(2) : Electrics connexion

This document is not contractual n° 6TE657461-1120 - THIRODE reserves the right to improve or modify its products without notice

Thirote

Rue des Frères Lumière - Z.I. Mitry Compans - 77292 MITRY MORY cedex
Tél.01 64 67 61 00 - Fax.01.64.67.61.01