


## High Temp GN 1/1 - Depth 700 Integral 4 doors model

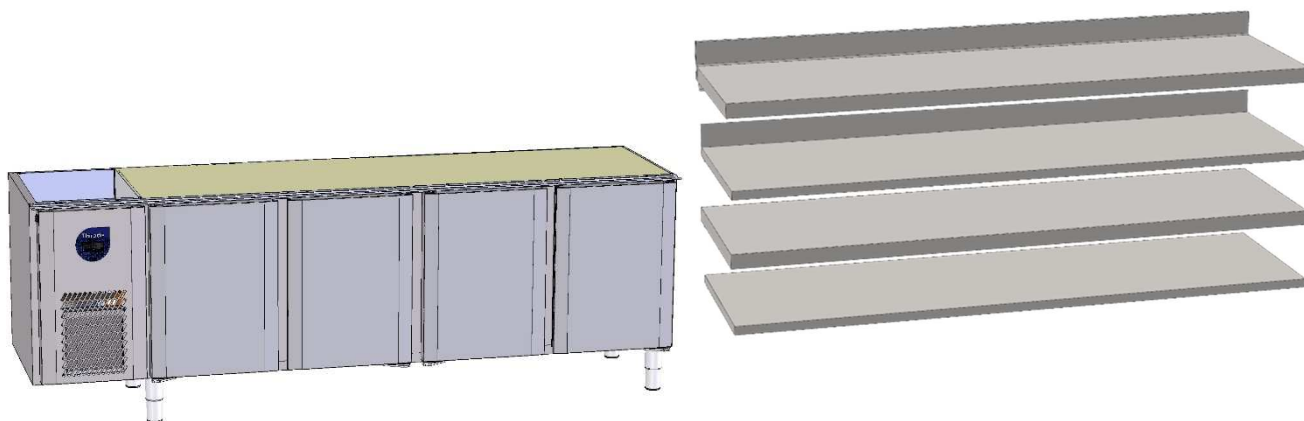

Heavy WorkTop with splashback : 615656  
Standard WorkTop with splashback : 619696  
Heavy WorkTop : 615676  
Standard WorkTop : 619938

Device code : (separatly worktop order)  
S/S model : 619135  
Colaminate./Alu model : 619138

- \* The **high temp** (0° à +12°C) refrigerated counter is designed to stock foodstuffs for an ambient temperature of 43°C. It works with R290 fluid.
- \* Capacity of **532 liters**. Delivered with 2 trayslide and 1 S/S shelf GN1/1 per door. The counter can fitted 8 shelves or bac (55mm), step 60mm.
- \* Regulation by electronic display, on/off switch, power indicator light and high and low temperature alarm, visual and audible.
- \* Automatic desfrost and vaporized defrost water by hot gas.
- \* 304 S/S or aluminium Inner shell.
- \* 304 S/S or colaminate external 3 faces. Anti corrosion galvanized unit support, external back and bottom.
- \* Fungicidal magnetic door gasket. Spring loaded hinges for automatic door closing with 90° dwell.
- \* S/S legs with adjustment for leveling (height 195 +25mm/-45mm).
- \* Cataphoresis treated evaporator.
- \* Bi-directional ventilation for temperature uniformity in the enclosure (Delta T °: <2 ° K).

### OPTIONS et ACCESSORIES

- |  |                  |
|--|------------------|
| - Heavy WorkTop with splashback                              | - Castors        |
| - Standard WorkTop with splashback                           | - S/S back cover |
| - Heavy WorkTop  |                  |
| - Standard WorkTop   |                  |
| - Sink (370 × 340 × 150)                                     |                  |
| - Lock per door  |                  |
| - USB recorder   |                  |
| - Radius inner bottom (304 S/S or aluminium)                 |                  |
| - 2 drawers 1/2  |                  |
| - 3 drawers 1/3  |                  |
| - Automatic closing reminder with damper for drawer unit 1/2 |                  |
| - Automatic closing reminder with damper for drawer unit 1/3 |                  |

#### Accessoires :

- GN 1/1 S/S shelf
- 2 × tray slide for 1 shelf

**Other options and accessories (on request):** Electric re-evaporation of defrost water, base for masonry plinth, technical compartment reversal, composition strip kit for drawer bin or castor kit.

*High temp model 4 doors integral*

[illegible]

Technical drawing of the Heavy WorkTop showing dimensions and adjustable legs. The drawing includes the following dimensions and labels:

- Heavy WorkTop** (Label)
- 700** (Top width)
- 20** (Top flange thickness)
- R7** (Top flange radius)
- 60** (Top flange height)
- 1000 -45** (Total height)
- +25** (Top flange offset)
- 670 -45 (1)** (Internal height 1)
- +25** (Internal offset 1)
- 300 -45 (2)** (Internal height 2)
- +25** (Internal offset 2)
- 565** (Internal width 1)
- 545** (Internal width 2)
- +25** (Internal offset 3)
- 840 -45** (Internal height 3)
- 650** (Internal height 4)
- +25** (Internal offset 4)
- 900 -45** (Total height 2)
- 350 (3)** (Internal width 3)
- 158 (3)** (Internal width 4)
- 100** (Internal width 5)
- 475** (Internal width 6)
- 120** (Internal width 7)
- Out : Ø17 (3)** (Internal hole diameter)
- Adjustable legs** (Label)
- +25** (Adjustable leg offset)
- 195 -45** (Adjustable leg height)

Standard WorkTop

Technical drawing showing the dimensions of the Standard WorkTop. The main dimensions are:

- Overall width: 700
- Overall height: 875 - 45 (Adjustable legs)
- Top panel height: 35
- Internal width: 565
- Internal height: 545
- Bottom panel height: 650
- Leg height: 840 - 45
- Leg diameter: 158 (3)
- Leg base diameter: 120
- Leg base width: 475
- Leg base height: 100
- Leg base diameter: 17 (3)
- Leg base width: 350 (3)
- Leg base height: 300 - 45 (2)
- Leg base height: 670 - 45 (1)
- Leg base height: 975 - 45

Adjustable legs +25 195 - 45

- (1) : Electric connexion  
(2) : Defrost water out  
(3) : Drain option



Safety : EN 60 335-1  
Hygiene : NF EN 1672-2

*This document is not contractual n° 6TE657457-1120 - THIRODE reserves the right to improve or modify its products without notice*

# Thirotde

Rue des Frères Lumière - Z.I. Mitry Compans - 77292 MITRY MORY cedex  
Tél.01 64 67 61 00 - Fax.01.64.67.61.01