










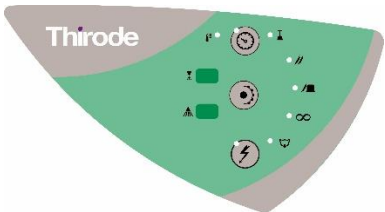

		Model	OREANE LC PRO 500	
		Code Production	GH50TTTHCDD	
Interface : 				
				
	Overall Dimension (Width-Depth-Height) *open	mm	724x818x1529(2010*)	
	Packaging Dimension (WxDxH)	mm	760x840x1520	
	Gross weight	Kg	117	
	Net weight	Kg	107	
	Volume	mc	0,97	
	Rack size	mm	500x500	
	Max door /hood opening	mm	450	
	Max glasses/plate Height	mm	425 / 440	
	General construction		double skin	
	Door/hood Construction		double skin	
	Tank construction		deep drawn	
	Tank volume	liter	20	
	Tank heating element	W	2500	
	Tank surface strainers		composite	
	Wash pump type		double flow	
	Wash pump power	W	700	
	Wash temperature	°C	60	
	Boiler type		without pressure	
	Boiler volume	liter	12	
	Back-flow system		break tank	
	Boiler heating element	W	8000	
	Rinse booster pump		YES	
	Rinse booster pump power	W	200	
	Rinse temperature	°C	80	
	Rinse water consumption	Liter /rack	2,6	
	Optimal external water pressure	bar	2 - 4	
	Drain system		deep drain	
	Drain pump		standard buil in	
	Rinse aid dispenser		YES	
	Detergent dispenser		YES	
	Wash cycle	sec	60 - 120 - 150 - continuous	
	Water softner	Continuous type	NO	
	Electric Power	W	8700	
	Electric Connection	V - ph - Hz	400V 3+N 50Hz	
	Fuse	A	16	
	Plates racks	Nr	780078	
	Flat Rack	Nr	780135	
	Cutterly Rack	Nr	780139	
	Electric cable		YES	

	Drain hose	YES
	Fill hose	YES

