
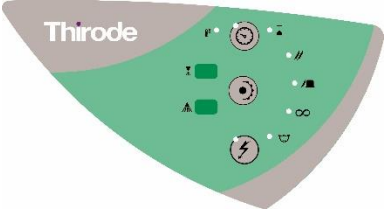











	Model	OREANE LC PRO 600	
	Code Production	TT3923THCDD	
	Interface :		
	Overall Dimension (Width-Depth-Height) *open	mm	788x835x1565(2080*)
	Packaging Dimension (WxDxH)	mm	870x830x1530
	Gross weight	Kg	130
	Net weight	Kg	120
	Volume	mc	1,1
	Rack size	mm	600x500
	Max door /hood opening	mm	465
	Max glasses/plate Height	mm	440
	General construction		double skin
	Door/hood Construction		double skin
	Tank construction		deep drawn
	Tank volume	liter	30
	Tank heating element	W	3000
	Tank surface strainers		composite
	Wash pump type		double flow
	Wash pump power	W	1500
	Wash temperature	°C	60
	Boiler type		without pressure
	Boiler volume	liter	12
	Back-flow system		break tank
	Boiler heating element	W	8000
	Rinse booster pump		YES
	Rinse booster pump power	W	200
	Rinse temperature	°C	80
	Rinse water consumption	Liter /rack	2,8
	Optimal external water pressure	bar	1 - 4
	Drain system		deep drain
	Drain pump		standard built in
	Rinse aid dispenser		YES
	Detergent dispenser		YES
	Water softner	Continuous type	NO
	Wash cycle	sec	60 - 120 - 150 – continuous
	Electric Power	W	9500
	Electric Connection	V - ph - Hz	400V 3N 50Hz
	Fuse	A	20
	Plates racks	Nr 1	70180
	Flat Rack	Nr 1	70181

	<i>Cutterly Rack</i>	<i>Nr1</i>	<i>780081</i>
	<i>Electric cable</i>		YES
	<i>Drain hose</i>		YES
	<i>Fill hose</i>		YES

