

AVANCIA PLUS, Electric cooking unit, RIBBED PLANCHA on open cupboard**3 mm Top****FlushTop****CleaningSystemPlus****PLANCHA RAINUREE
B1A9PR+10PE****FullPowerSystem**

** Shown with door
kit Accessory*

AVANCIA PLUS ASSETS

3mmTop : One piece 3mm thick stainless steel structure.

FlushTop : Module can be butt jointed.

CleaningSystemPlus : Plate that is flush with the worktop fitted over a channel with continuous water flow floating the grease away.

FullPowerSystem : Regulated cooking top.

GENERAL

- * All stainless steel construction designed to avoid any infiltration.
 - * Unfailing sturdy equipment for direct wall fixation.
 - * Controls grouped together and recessed protecting them for impact and spillages.
 - * Appliance delivered with 200mm fixed stand with 4 adjustable feet.
- Representation avec Accessoire kit porte

PLANCHA

- * Fitted with a 15mm thick ribbed Martin steel plate, providing a surface area of 48 dm², finish vibrated.
- * Heated by a bank of contact elements surrounded by a stainless box with rockwool insulation.
- * Controlled by thermostat permits regulation of plate temperature from 50 to 270°C: 2 independent controls.
- * Delivered with a shaped spatula for cleaning the ribbed section.

OPEN CUPBOARD

- * Cupboard suitable for GN 1/1 cookware, stainless base with raised edges to prevent drips (1000mm wide).

OPTION

- * One-piece wall or central top.

ACCESSORIES

- * See technical data : General features.

STANDARDS : Compliance with standards

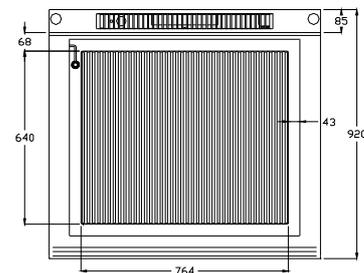
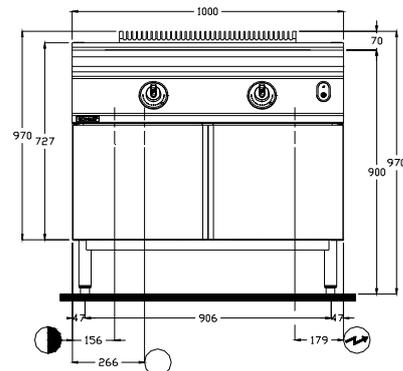
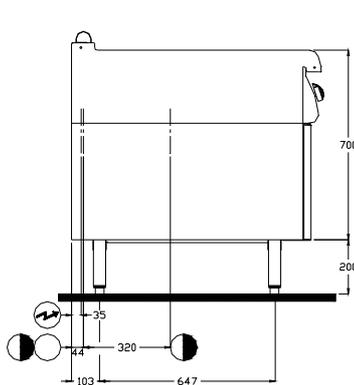
EN 60335-2-38 and EN 60335-2-49: European standards relating to the safety of electric appliances. (French standards: Classification index C 73-838 and C 73-849).

IP 25 and IK 9: Protection indexes.

XP U 60-010: Hygiene.

B1A9PR+10PE

-  **ELECTRICAL connection**
Electric inlet at 615mm from the floor
(Flexible cable 1.5 m in length)
-  **POTABLE COLD WATER**
Water inlet at 600mm from the floor
-  **DRAIN**
Drain outlet at 535mm from the floor
Delivered with drain set up at the back of
the equipment, possibility to set up the
drain outlet pipe inside the cupboard


DIMENSIONS (mm)

Width	1000
Depth x Height	920 x 970
Plate	424 x 640
Useful surface (dm ²)	48

PACKAGING (mm)

Width	1140
Depth x Height	1090 x 1150

WEIGHT (KG)

150

COMPOSITION OF TOP

Plate width 424	1
-----------------	---

COMPOSITION OF THE BOTTOM PART

Width of cupboard	600
-------------------	-----

 **ELECTRICITY** (Three-phase 230V+E or 400V+N+E)

Appliance

Power (kW)	230V 3a.c.	10.8
	400V 3Na.c.	10.8
Max. Intensity (A)	230V 3a.c.	27.1
	400V 3Na.c.	15.6

Accessory cupboard heating kit (to be added to the total power of the appliance)

Power (kW)	230V 3a.c.	2
	400V 3Na.c.	2

 **POTABLE COLD WATER**

Pressure (Min / Max)	150/600 kPa (1.5 bars / 6 bars)
Max temperature	30°C
Nature	Filtered to 50 microns
Connection	Flexible Ø 20/27 female (3/4")

 **DRAIN**

Connection	Smooth stainless steel tube Ø 25 + silicon tube
------------	---